



CONTRACTOR EQUIPMENT

2011 / 2012 **Australia**



TABLE OF CONTENTS

TRUE COAT PRO X CORDLESS SPRAYER.....	2
NEW ELECTRIC-POWERED MAGNUM AIRLESS SPRAY SYSTEMS	4
ELECTRIC-POWERED AIRLESS SPRAYERS-ULTRA390. ULTRA 395	5
ELECTRIC-POWERED AIRLESS SPRAYERS-ULTRA MAX II 490	6
ULTRA MAX II 495/595 ELECTRIC-POWERED AIRLESS SPRAYERS	7
NEW ULTRA MAX II STANDARD 695/795/1095 ELECTRIC-POWERED AIRLESS SPRAYERS	8, 9
NEW ULTRA MAX II PREMIUM 695/795/1095 ELECTRIC-POWERED AIRLESS SPRAYERS	10
FINISHPRO 390/395 AIR ASSISTED AIRLESS SPRAYERS & ACCESSORIES	11, 12
GMAX 3400 PETROL POWERED AIRLESS UNITS	13
GMAX II PETROL PREMIUM POWERED AIRLESS UNITS	14, 15
HYDRAULIC AIRLESS SPRAYERS	16
HYDRAULIC AIRLESS SPRAYERS	17
TEXSPRAY ELECTRIC TEXTURE SPRAYERS	18
TEXSPRAY PETROL POWERED TEXTURE SPRAYERS	19
TEXSPRAY ACCESSORIES	20
HIGH VOLUME LOW PRESSURE (HVLP) SPRAY UNITS	21, 22
HIGH VOLUME LOW PRESSURE (HVLP) ACCESSORIES	23, 24
AQUA MAX PRESSURE WASHERS	25, 26
PRESSURE WASHER ACCESSORIES	27
LINEDRIVER AND LINEDRIVER HD RIDE-ON SYSTEM	28
FIELDLAZER SPORTS FIELD STRIPER AND LINELAZER 3400 LINE STRIPER	29
LINELAZER PETROL-POWERED AIRLESS LINESTRIPERS & ACCESSORIES	30
LINELAZER IV AUTO LAYOUT LINE STRIPERS	31
GRINDLAZER-LINE REMOVAL SYSTEM	32, 33
GRINDLAZER ACCESSORIES	34
AIRLESS ACCESSORIES-RAC X SPRAY SYSTEM (TIPS. GUARDS & SEALS)	35
AIRLESS ACCESSORIES-RAC 5 & XHD REVERSIBLE SPRAY TIPS	36
TIP RECOMMENDATION AND WEAR CHARTS	37
CONTRACTOR & CONTRACTOR FTx SPRAY GUNS	38
AIRLESS ACCESSORIES-AIRLESS SPRAY GUNS	39
AIRLESS ACCESSORIES-AIRLESS SPRAY GUNS	40
AIRLESS ACCESSORIES-EXTENDED REACH TOOLS	41
AIRLESS ACCESSORIES-PRESSURE ROLLER KITS / FRAMES / COVERS	42
AIRLESS ACCESSORIES-HOSES / FITTINGS / FLUIDS	43
AIRLESS ACCESSORIES-MANIFOLD FILTERS / INLET STRAINERS	44
AIRLESS ACCESSORIES-PUMP REPAIR KITS	45
QUICK REFERENCE PARTS CHARTS-ELECTRIC POWERED SPRAYERS	46
QUICK REFERENCE PARTS CHARTS-PETROL SPRAYERS & LINESTRIPERS	47

NEW !! in 2011

TrueCoat Pro X Cordless Sprayers

For the small and touch up jobs



Waterbased materials only !!

TrueCoat Pro-X

- Bringing airless spray into the palm of your hand
- Breakthrough piston-pump design delivers a high quality finish with Pro Results!
- Unique suction tubes for spraying in all directions
- Disposable cup liners for fast and easy clean-up
- Also available in 1.5 L cup size
- Reverse-A-Clean (RAC) tips are high precision tips designed exclusively for use with ProSpray Technology
- Integrated tip and guard shuts fluid off at the tip – no spits!
- Available in 7 tip sizes to spray a variety of materials and applications
- Conveniently located controls for quick prime and trigger safety
- Red light quickly indicates when battery needs to be charged

TrueCoat Pro-X Fine Finish

NEW

Available Sept 2011 !!!



Oil based materials compatible

- New ProControl System allows you to optimize your material output for each tip, material and application. Resulting in a superior finish!
- New Hi/Lo Switch allows you to reduce the motor speed for lower flow with lighter weight materials and detail work.
- New Pressure Control Knob allows you to lower your output pressure - giving you additional control with smaller tips and light-weight fine finish materials
- New Turpentine resistant 24 oz cup
- New Flexible suction tube for multi-directional spraying
- New SlimLine battery is 50% lighter and more compact than current battery – making the TrueCoat Pro-X Fine Finish more maneuverable
- New ProSpray technology taken to next level, now optimized for fine finish spraying with solvent based materials!
- New Brushless DC Motor
- New Turpentine resistant design - packings and seals
- New Breakthrough piston-pump design optimized for lower fine finish flow rates

TrueCoat Pro X Cordless Sprayers –

	Part Number	Description
Water based materials only !! 	258850	<u>TrueCoat Pro X</u> • 0.017" Max Tip size • Brushless DC Motor • 2000 psi Factory Set • 0.95 litres Tilt-N-Spray Cup • 18V Lithium Ion Includes ➤ (2) Lithium Ion Power Packs ➤ Battery Charger ➤ (2) Pro Spray RAC Tips – 411 & 515 ➤ Lithium Ion Battery Charger ➤ Cup with 5 Drop-in Liners and Cover ➤ Pump Armor ➤ Fine Finish Optimizer ➤ Cordless Sprayer Storage Case
Oil based materials !!  Available Sept 2011	16H241	<u>TrueCoat Pro X Fine Finish</u> • 0.012" Max Tip size • Brushless DC Motor • Adjustable 500 – 1500 psi • Solvent Resistant design • 0.70 litre Solvent Resistant Multi-Spray Cup • 18V Lithium Ion Slim • Hi-Lo motor speed switch Includes ➤ (2) Lithium Ion SlimLine Power Packs ➤ Battery Charger ➤ (2) Fine Finish RAC Tips – 210 & 312 ➤ Lithium Ion Battery Charger ➤ Cup with 5 Drop-in Liners and Cover ➤ Pump Armor ➤ Cordless Sprayer Storage Case
	PST*** FNS*** 24F893 24F727 24F728 24F729 106555 24F045 262602 24E377 24E376 24F039 24F640 24F641 16D563 16H641 16G615 16G610 16H618 16D560 16D561 16D562 16F628	<u>TrueCoat Pro X Accessories</u> TrueCoat Tip - Grey TrueCoat Pro X Fine Finish Tip - Green ProPack----- 12" Tip Extension 24" Tip Extension Flexible Extension Suction Tube, O ring Optimizer – 2 pack Inlet Poppet Valve ----- Not to be used with the TrueCoat Pro X Fine Finish Shoulder Strap 60# Tip Filter – 1 pack 60# Tip Filter – 3 pack 100# Tip Filter – 1 pack 100# Tip Filter – 3 pack TrueCoat Pro X Pump Kit TrueCoat Pro X Fine Finish Pump Kit 18V Lithium Ion Battery 18V Lithium Ion Battery – Finish finish unit only ! 0.07 litre material Cup and Cover 0.95 litre Material Cup and Cover 1.42 litre Material Cup and Cover Material Cup liners Portable Battery Charger - Car

New !!!! Magnum Electric Airless Entry Level Sprayer

NEW !! 	16J750	Magnum X5 Airless Spray • 1 Gun to 0.015" Tip / 0.91 lpm / 2,800 psi • 1/2 hp DC Motor • New quick prime feature • Compact Stand Design • Max Hose length – 75ft (23m) • Weighs only 7kg <u>Sprayer includes</u> • SG2 Spray gun • Comes c/w 25ft x 1/4" hose (7.5m x 6.3mm) • RAC V 515 tip and Guard • Quick Start guide Recommended Occasional use up to 475 ltrs/ year
NEW !! 	16J751	Magnum X7 Airless Spray • 1 Gun to 0.017" Tip / 1.17 lpm / 3,000 psi • 5/8 hp DC Motor • New Quick Prime Feature • Compact Cart Design • Max Hose Length – 100ft (30m) • Weight – 12kg <u>Sprayer includes</u> • SG3 Spray gun • Comes c/w 50ft x 1/4" hose (15m x 6.3mm) • RAC V 515 tip and Guard • Quick Start Guide Recommended Occasional use up to 665 ltrs/ year

Electric Powered Airless Sprayers

	Part Number	Description	
	256392	390 Pro Step Unit Complete with FTx gun, RAC X Tip, RAC X Guard and 1/4" x 50' (15mtr) Airless Hose. • 0.019" Max Tip / 3,300 psi / 1.8 lpm • 5/8 HP DC Motor • Endurance Pump with Swivel Suction Hose • Mechanical Pressure Control Delivers Consistent Spray Pattern (<400psi Deadband) • Liquid Filled Pressure Gauge (not shown) • Lightweight and Portable • Exclusive Poll Design Frame	
	254998	390 Stand Unit Complete with FTx gun, RAC X Tip, RAC X Guard and 1/4" x 50' (15mtr) Airless Hose. • 0.019" Max Tip / 3,300 psi / 1.8 lpm • 5/8 HP DC Motor • Endurance Pump with Swivel Suction Hose • Mechanical Pressure Control Delivers Consistent Spray Pattern (<400psi Deadband) • Liquid Filled Pressure Gauge (not shown) • Lightweight and Portable - Only 13.6 kg	
	262024	390 Hi-Boy Unit Complete with FTx gun, RAC X Tip, RAC X Guard and 1/4" x 50' (15mtr) Airless Hose. • 0.019" Max Tip / 3,300 psi / 1.8 lpm • 5/8 HP DC Motor • Endurance Pump with Swivel Suction Hose • Mechanical Pressure Control Delivers Consistent Spray Pattern (<400psi Deadband) • Liquid Filled Pressure Gauge (not shown) • Lightweight and Portable • Hi-Boy Cart Design	
	234180	Ultra 395 Stand Unit Complete with FTx gun, RAC X Tip, RAC X Guard, 1/4" x 50' (15mtr) Airless Hose & Tools • 0.023" Max Tip / 3,300 psi / 2.0 lpm • 5/8 HP TEFC DC Motor • Endurance Pump with Swivel Suction Hose • Digital Pressure Display • SmartControl 1.0 Pressure Control • Vertical EasyOut Pump Filter • Ultra Gear Drive • WatchDog Pump Protection • Portable - Only 19.5 kgs.	

Ultra Max II Airless Sprayer

	Part Number	Description	
 <i>c/w</i> Lifetime Motor Warranty & 2 Year Warranty (see page 48 for details)	249932	Ultra Max II 490 Stand Unit Complete with FTx II gun, RAC X Tip, RAC X Guard, 1/4" x 50' (15mtr) Blue Max II Airless Hose & Tools (Shifter & Multi Tool). • 0.023" Max Tip / 3,300 psi / 2.0 LPM • 1 HP Brushless DC Motor - Lifetime Warranty • Proven Endurance Pump - Long-Life V-Max Blue Packings, Chromex Rod & Hardened SS cylinder • SmartControl 2.0 Pressure Control - Zero deadband at low pressure • Digital Pressure Display • Resettable & Life Litre Counter • Swivel Inlet Suction Hose • EasyOut Pump Filter • Portable Lightweight Design - Only 15 kgs.	
	288526	5.7 Itr Hopper Accessory Easily connects without tools onto 390, Ultra 395 and Ultra Max II 490/495/595 spray units.	

Ultra Max II Electric Airless Sprayers

All Ultra Max II Sprayers c/w Lifetime Motor Warranty & 2 Year Warranty. (SEE PAGE 48 FOR DETAILS)

	Part Number	Description	
	249933	Ultra Max II 495 - Stand Unit • 0.025" Max Tip / 3,300 psi / 2.3 lpm • 1.2 HP Brushless DC Motor – Lifetime Warranty • Proven Endurance Pump – Long-Life Packings • SmartControl 2.0 Pressure Control • Digital Pressure Display • Resettable & Life Litre Counter • Swivel Inlet Suction Hose • EasyOut Pump Filter • Portable – only 16kg	
	253104	Ultra Max II 495 - Lo-Boy Cart • 0.025" Max Tip / 3,300 psi / 2.3 lpm • 1.2 HP Brushless DC Motor – Lifetime Warranty • Proven Endurance Pump – Long-Life Packings • SmartControl 2.0 Pressure Control • Digital Pressure Display • Resettable & Life Litre Counter • Swivel Inlet Suction Hose • EasyOut Pump Filter	
	253105	Ultra Max II 495 - Hi-Boy Cart • 0.025" Max Tip / 3,300 psi / 2.3 lpm • 1.2 HP Brushless DC Motor – Lifetime Warranty • Proven Endurance Pump – Long-Life Packings • SmartControl 2.0 Pressure Control • Digital Pressure Display • Resettable & Life Litre Counter • Tilt Back Cart Design • EasyOut Pump Filter	
	253107	Ultra Max II 595 - Lo-Boy Cart • 0.027" Max Tip / 3,300 psi / 2.6 lpm • 1.4 HP Brushless DC Motor – Lifetime Warranty • Proven Endurance Pump – Long-Life Packings • SmartControl 2.0 Pressure Control • Digital Pressure Display • Resettable & Life Litre Counter • Swivel Inlet Suction Hose • EasyOut Pump Filter	
	249934	Ultra Max II 595 - Hi-Boy Cart • 0.027" Max Tip / 3,300 psi / 2.6 lpm • 1.4 HP Brushless DC Motor – Lifetime Warranty • Proven Endurance Pump – Long-Life Packings • SmartControl 2.0 Pressure Control • Digital Pressure Display • Resettable & Life Litre Counter • Tilt Back Cart Design • EasyOut Pump Filter • Weighs 32.7 kg	

All Ultra Max II 495/595 units come complete with a FTx Gun, 50ft (15mtr) x 1/4" Blue Max II Airless Hose, RAC X Tip, RAC X Guard, Throat Seal Liquid.




Ultra® Max II 695/795/1095

Standard and Premium Models

- Higher Performance – Performance increased by 1 full tip size on all sprayers. Higher production spraying gets the job done faster!
- QuikReel™ – (Premium Models Only!!) Integrated hose reel allows contractor to reel/unreel up to 300 feet of hose in seconds! 50' Hose and Gun come connected from the factory ready to spray!
- FastFlush™ – (Premium Models Only!!) Next generation cleaning technology which cleans faster. Simple to operate – just rotate the prime valve to the FastFlush position!
- SmartControl™ 2.0
- MaxPower Brushless DC Motor
- Endurance™ Pump
- ProConnect™ Pump Removal System (1095 Only!)
- Smart Control™ 2.0 Digital Display
- WatchDog™ (Premium Models Only!!) Stops pump when paint runs out
- Toolbox (Premium Models Only!!)



1095 Models Only !

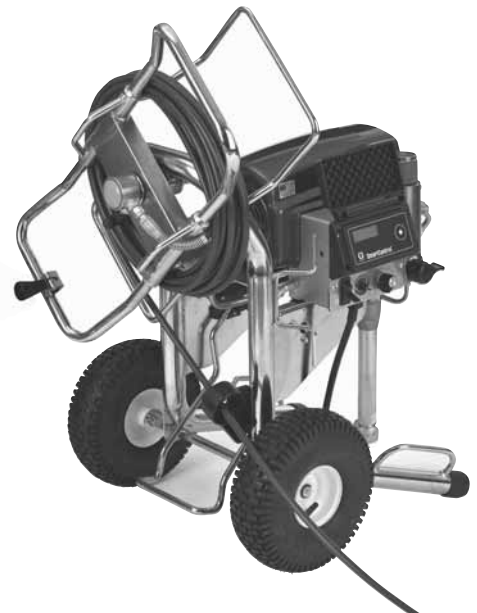

Ultra Max II Electric Airless Sprayers – STANDARD Models

All 2010 Ultra Max II Sprayers c/w Lifetime Motor Warranty & 2 Year Warranty. (SEE PAGE 47 FOR DETAILS)

	Part Number	Description	
	258874	Ultra Max II 695 Lo-Boy Cart • 0.031" Max Tip / 3,300 psi / 3.6 lpm • 2.0 HP Brushless DC Motor, Lifetime Warranty • QuickChange System - Long-Life Packings • SmartControl 2.0 Pressure Control • Digital Pressure Display • FTx Gun • Swivel Inlet Suction Hose • EasyOut Pump Filter • Weight - 42kg	
	258876	Ultra Max II 695 Hi-Boy Cart • 0.031" Max Tip / 3,300 psi / 3.6 lpm • 2.0 HP Brushless DC Motor, Lifetime Warranty • QuickChange System - Long-Life Packings • SmartControl 2.0 Pressure Control • Digital Pressure Display • FTx Gun • Tilt Back Cart Design • EasyOut Pump Filter • Weight - 42kg	
	258879	Ultra Max II 795 Lo-Boy Cart • 0.033" Max Tip / 0.025" x 2 guns / 0.019 x 3 guns • 3,300 psi / 4.1 lpm • 2.2 HP Brushless DC Motor -Lifetime Warranty • QuickChange System - Long-Life Packings • SmartControl 2.0 Pressure Control • Digital Pressure Display • FTx Gun • Swivel Inlet Suction Hose • EasyOut Pump Filter • Weight - 44kg	
	258881	Ultra Max II 795 Hi-Boy Cart • 0.033" Max Tip / 0.025" x 2 guns / 0.019 x 3 guns • 3,300 psi / 4.1 lpm • 2.2 HP Brushless DC Motor - Lifetime Warranty • QuickChange System - Long-Life Packings • SmartControl 2.0 Pressure Control • Digital Pressure Display • FTx Gun • Tilt Back Cart Design • EasyOut Pump Filter • Weight - 44kg	
	258884	Ultra Max II 1095 Hi-Boy Cart • 0.035" Max Tip / 0.027" x 2 guns / 0.021 x 3 guns • 3,300 psi / 4.5 lpm • 2.4 HP Brushless DC Motor - Lifetime Warranty • QuickChange System - Long-Life Packings • SmartControl 2.0 Pressure Control • Digital Pressure Display • FTx Gun • Tilt Back Cart Design • EasyOut Pump Filter • Weight - 55kg	

**All Ultra Max II Standard units include an FTx Gun, 50ft (15mtr) x 1/4" BlueMax Hose,
RAG X 517 Tip and RAG X HandTite Guard, Throat Seal Liquid**

Ultra Max II Electric Airless Sprayers – PREMIUM Models

All 2010 Ultra Max II Sprayers c/w Lifetime Motor Warranty & 2 Year Warranty. (SEE PAGE 48 FOR DETAILS)

	Part Number	Description	
	258877	Ultra Max II 695 Hi-Boy Cart • 0.031" Max Tip / 3,300 psi / 3.6 lpm • 2.0 HP Brushless DC Motor, Lifetime Warranty • QuickChange System - Long-Life Packings • SmartControl 2.0 Digital Pressure Control • Digital Pressure Display • 300ft QuickReel • FastFlush Cleaning System • WatchDog protection System • Contractor Gun • Tilt Back Cart Design • EasyOut Pump Filter • Weight - 42kg	
	258882	Ultra Max II 795 Hi-Boy Cart • 0.033" Max Tip / 3,300 psi / 4.1 lpm • 2.2 HP Brushless DC Motor, Lifetime Warranty • QuickChange System - Long-Life Packings • SmartControl 2.0 Digital Pressure Control • Digital Pressure Display • 300ft QuickReel • FastFlush Cleaning System • WatchDog protection System • Contractor Gun • Tilt Back Cart Design • EasyOut Pump Filter • Weight - 44kg	
	258886	Ultra Max II 1095 Hi-Boy Cart • 0.035" Max Tip / 3,300 psi / 4.5 lpm • 2.4 HP Brushless DC Motor, Lifetime Warranty • Pro Connect Pump System - Long-Life Packings • SmartControl 2.0 Digital Pressure Control • Digital Pressure Display • 300ft QuickReel • FastFlush Cleaning System • WatchDog protection System • Contractor Gun • Tilt Back Cart Design • EasyOut Pump Filter • Weight - 55kg	

All Ultra Max II Premium units include a Contractor Gun, 50ft (15mtr) x 1/4" BlueMax Hose, RAC X 517 Tip and RAC X HandTite Guard, Throat Seal Liquid, WatchDog, FastFlush and on board Toolbox



FastFlush.

SMARTCONTROL™



1095 Models Only !!

FinishPro™ Sprayers

Air-Assisted Airless Fine Finish Sprayers



FinishPro 390

True Air-Assisted AND Airless Sprayer

- Ability to spray airlessly with a .021tip
- Air-Assisted – high quality finefinish at a high production rate

FinishPro 395

True Air-Assisted AND Airless Sprayer

- Full capabilities of the 395 airless spraying at a .023 tip
- Air-Assisted – high quality finefinish at a high production rate
- Exclusive Smart Control 1.0 which tightens deadband



True Air-Assisted and Airless Sprayer (FinishPro 390 and 395 Only)

- Ability to spray airlessly with up to a .021 tip.
- Air-Assisted Airless producing –
 - Higher quality finish
 - Less Overspray
 - Higher Transfer efficiency
 - High Production rate

Customized Air Compressor

- Quiet, two-cylinder design produces 82 lpm (3.2 cfm) at 35 PSI.

Graco's Proven Endurance Pump

- Long-life V-Max™ Blue Packing, Chromex™ Rod, hardened stainless steel cylinder.
- Hammer access inlet valve – easy to clear debris.

Graco's G40 Air Assisted Airless Spray Gun

- Lightweight, compact design is ideal for getting into tight areas.
- Fine Finish RAC tips provide a superior spray finish.
- LTX RAC tips can also be used for heavier materials.
- All new optimized air cap resulting in a softer, more consistent spray pattern.
- Ultra light trigger pull and form fitting handle.

FinishPro Air Assisted Airless Sprayers

	Part Number	Description	
	255116	FinishPro 390 Lo-Boy Cart • 0.021" Max Tip / 3,300 psi / 1.8 lpm • 5/8 HP DC Motor • Endurance Pump with Swivel Suction Hose • Mechanical Pressure Control Delivers Consistent Spray Pattern (< 400psi Deadband) • Liquid Filled Pressure Gauge (not shown) • Quiet Twin Cylinder Compressor producing 3.2 cfm of air • G40 Premium AIA Spray Gun	
	255117	Finish Pro 395 Hi-Boy Cart • 0.023" Max Tip / 3,300 psi / 2.0 lpm • 5/8 HP TEFC DC Motor • Endurance Pump with Chromex Piston • Digital Pressure Display • SmartControl 1.0 Pressure Control • Vertical EasyOut Pump Filter • Ultra Gear Drive • Twin Cylinder Compressor producing 2.9 cfm of air • G40 Premium AIA Spray Gun	

FinishPro Air Assisted Airless Accessories

	Part Number	Description	
	288513	G40 Air Assisted Airless Gun	
	257096	AA30 Air Assisted Airless RAC Gun	
	256976	25ft Fluid & Air Hose Set FP 290	
	288621	25ft Fluid & Air Hose Set FP 390/395	
	288620	50ft Fluid & Air Hose Set FP 390/395	
	288526	Hopper Assembly, 5.7 ltr, FP 390/395	
	288839	Air Cap RAC AA30/G40 Gun	
	224454	Tip Filter Kit 60 mesh (5 pack) G40	
	224453	Tip Filter Kit 100 mesh (5 pack) G40	
	246385	Inlet Strainer FP 290/390/395	
	15X841	Whip hose FP 290	
	15W961	Compressor Filter FP 290/390/395	

GMAX and GMAX II

Petrol Powered Airless Sprayers



GMAX 3400

- **Endurance Pump** – no tool access to inlet valve
- **Electronic Pressure Control** – max. 3300 psi provides tighter more consistent spray pattern.
- **Single Stage Gear Drive System** – increased performance and reduced noise
- **Clutch System** – now the same as the 3900
- **Flow Through Paint Filter** – improved filtration and easy cleaning
- **On Board Manual Holder** – store all manuals with the machine
- **Chromex Rod** – for longer life


	Part Number	Description	
	248664	GMAX 3400 Hi-Boy Cart <i>Ideal for residential and light commercial jobs</i> • 1 Gun to 0.027" Tip / 2.8 lpm / 3,300 psi • Electronic Pressure Control – for a more consistent fan pattern • Reliable 4.0 HP Honda Motor with Oil Alert • Flow Through Paint Filter • Single Stage Gear Drive System • Clutch System • Weighs 40 kg	
	248666	GMAX 3400 Lo-Boy Cart	

All GMAX units include a Contractor Gun, 15mtr (50ft) x 1/4" Hose.

GMAX™ II

3900 / 5900 / 7900

- QuikReel™ – Integrated hose reel allows contractor to reel/unreel up to 300 feet of hose in seconds! Hose and gun come connected from the factory ready to spray!
- SmartControl 2.0
- Advantage Drive System™
- Honda® Power
- Endurance Pump™
- MaxLife™ Pump [7900 only]
- ProConnect™ Pump Removal System
- Smart Control™ 2.0 Digital Display
- WatchDog™ – Stops pump when paint runs out
- Toolbox – On Board

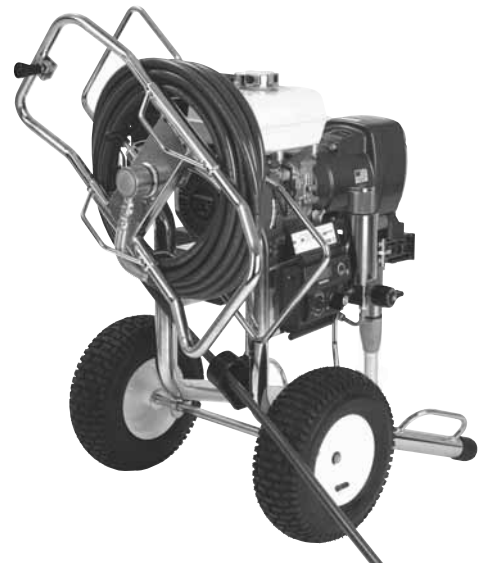

GMAX II Petrol Powered Airless Sprayers

	Part Number	Description	
 	258731	GMAX II 3900 Hi-Boy Cart <i>For residential and light to medium commercial jobs</i> • 1 Gun to 0.036" Tip / 4.7 lpm / 3,300 psi • 3 Guns to 0.018" Tip • SmartControl Digital Pressure Control • Digital Display • WatchDog Toggle Switch • 300ft QuikReel • "Revolutionary" ProConnect System -No Tools Pump Removal/Replacement • Exclusive Advantage Drive System • Endurance Pump with Chromex Rod for longer life • Reliable 4.0 HP Honda Motor with Oil Alert • On Board Tool Box & Manual Holder • Weighs 49 kg	
	258736	GMAX II 3900 Lo-Boy Cart	
 	258732	GMAX II 5900 Hi-Boy Cart <i>For medium to large residential and commercial jobs</i> • 1 Gun to 0.043" Tip / 6.0 lpm / 3,300 psi • 4 Guns to 0.019" Tip • SmartControl Digital Pressure Control • Digital Display • 300ft QuikReel • WatchDog Toggle Switch • "Revolutionary" ProConnect System -No Tools Pump Removal/Replacement • Exclusive Advantage Drive System • Endurance Pump with Chromex Rod for longer life • Reliable 5.5 HP Honda Motor with Oil Alert • On Board Tool Box & Manual Holder • Weighs 64 kg	
	258737	GMAX II 5900 Lo-Boy Cart	
 	258733	GMAX II 7900 Hi-Boy Cart <i>Ideal for larger residential and commercial jobs</i> • 1 Gun to 0.048" Tip / 8.3 lpm / 3,300 psi • 4 Guns to 0.023" Tip • SmartControl Digital Pressure Control • Digital Display • WatchDog Toggle Switch • 300ft QuikReel • "Revolutionary" ProConnect System - No Tools Pump Removal/Replacement • Exclusive Advantage Drive System • 'MaxLife' Rod and Sleeve. • Reliable 6.5 HP Honda Motor with Oil Alert • On Board Tool Box & Manual Holder • Weighs 67 kg	
	258738	GMAX II 7900 Lo-Boy Cart	

All GMAX II units include a Contractor Gun, 15mtr (50ft) x 1/4" hose (except GMAX II 7900 which has a 15mtr (50ft) x 3/8" hose, RAC X Tip and Guard. Lo-Boy models are not always stocked but are available upon request.

Hydraulic Airless Sprayers

Gas Hydraulic Sprayer



- ✓ Exclusive Chromex Endurance Pump
- ✓ Exclusive Graco Hydraulic Motor
- ✓ Exclusive High Capacity Cooling System
- ✓ Crush-Proof Rock Catcher & Filter

	Part Number	Description	Suggested Trade Price Each GST Inclusive
	253957	GH 130 Sprayer -Gas Powered • 1 Gun to 0.037" Tip / 4.9 lpm / 3,300 psi • High Efficiency Hydraulic Motor • Endurance Pump with NEW Chromex Rod for longer life • 4.0 HP Honda Gas Motor • Weighs 68 kg <i>c/w 1/4" x 15mtr (50ft) Hose, 3' Whip Hose, Contractor II Gun & RAC X Tip System</i>	

Hydraulic Airless Sprayers

	Part Number	Description	
 	255094	EH200 Sprayer -Electric Powered • 1 Gun to 0.037" Tip / 5.7 lpm / 3,300 psi • 4 Guns to 0.017" Tip • High Efficiency Hydraulic Motor • Endurance Pump with Chromex Rod for longer life • 3.0 HP Electric Motor -15amp • Weighs 73.9 kg <i>clw 1/4" x 15mtr (50ft) Hose, 3' Whip Hose, Contractor II Gun & RAC X Tip System</i>	
	248943	Convert to Petrol Motor Kit -5.5HP	
 	253962	GH200 Sprayer -Petrol Powered • 1 Gun to 0.047" Tip / 8.14 lpm / 3,300 psi • 4 Guns to 0.022" Tip • High Efficiency Hydraulic Motor • Endurance Pump with Chromex Rod for longer life • Reliable 5.5 HP Honda Motor with Oil Alert • Weighs 73.9 kg <i>clw 3/8" x 15mtr (50ft) Hose, 3' Whip Hose, Contractor II Gun & RAC X Tip System</i>	
	248946	Convert to Electric Motor Kit -3.0HP	
 	253965	GH230 Sprayer -Petrol Powered • 1 Gun to 0.053" Tip / 8.9 lpm / 3,300 psi • 5 Guns to 0.023" Tip • High Efficiency Hydraulic Motor • Endurance Pump with Chromex Rod for longer life • Reliable 6.5 HP Honda Motor with Oil Alert • Weighs 76.2 kg <i>clw 3/8" x 15mtr (50ft) Hose , 3' Whip Hose, Silver Plus Gun & RAC X Tip System</i>	
 	253968	GH300 Sprayer -Petrol Powered • 1 Gun to 0.057" Tip / 11.4 lpm / 3,300 psi • 6 Guns to 0.023" Tip • High Efficiency Hydraulic Motor • Endurance Pump with Chromex Rod for longer life • Reliable 9.0 HP Honda Motor with Oil Alert • Weighs 88.4 kg <i>clw 3/8" x 15mtr (50ft) Hose, 3' Whip Hose, SilverPlus Gun & RAC X Tip System</i>	
	249617	GH833 "BIG RIG" Sprayer - • 1 Gun to 0.065" Tip / 15.1 lpm / 4000 psi • 6 Guns to 0.026" Tip • HD Graco Hydraulic System • MaxLife Endurance Pump -Quickchange Pump • Reliable 13 HP Honda Motor with Oil Alert <i>clw 3/8" x 15mtr (50ft) Xtreme Duty Hose, 3' Whip Hose, Silver Plus Gun & RAC V Tip System</i>	
	249767	GH833 OEM (Hydraulic & Displacement pump only)	
	287843	GH833 Direct Immersion Kit	
		<i>More Info Refer to Gas Sprayer brochure 3375548</i>	

TexSpray Electric Powered Texture Sprayers

	Part Number	Description	
	248315	TexSpray RTX 1500 Air Spray • 7.6 lpm Max Material Delivery • 100 psi Max Material Pressure (with Soft Start Feature) • 45psi/6.5 cfm Max Atomising Air • c/w 25ft x 1" Hose, Trigger Gun and round tips, 3,4,6,8,10 & 12mm • 2 HP Motor (Compressor & Pump) • 7/8" RotoFlex HD Pump • Quick Change Pump Section -No Tools • Large Hopper - 56 ltrs • Weighs 56 kg <i>Refer Graco for typical materials sprayed</i>	
	287314	Roto Flex Pump (hose)	
	258888	TexSpray Mark V Airless Spray • Inlet valve sits near bottom of the bucket, allowing priming and pumping of materials other pumps can't move • Utilises Ultra Max 111095 Features • 300ft Quikreel • Comes c/w 50ft x 3/8" hose, heavy duty texture gun and GHD Guard & Tips (527 & 631) • 3,300 psi / 0.037" max tip / 4.7 lpm • 2.4 HP Brushless DC Motor - Lifetime Warranty • Exclusive ProConnect - No Tool Pump Removal • Proven Endurance Pump - Long-Life Packings • Specialty Designed, Submerged Foot Valve with MaxFlo fluid passages and large ball check • SmartControl 2.0 Pressure Control • Digital Pressure Display • Tilt Back Cart Design • EasyOut Pump Filter <i>Refer Graco for typical materials sprayed</i>	
	249628	TexSpray Mark X Airless Spray • Inlet valve sits near bottom of the bucket, allowing priming and pumping of materials other pumps can't move • c/w 50ft x 3/8" hose, heavy duty texture gun and GHD Guard & Tips (527 & 631) • 3,300 psi / 0.045" max tip / 8 lpm • 2.5 HP Brushless DC Motor - Lifetime Warranty • Use 20 amp outlet • Exclusive ProConnect - No Tool Pump Removal • Proven Endurance Pump - Long-Life Packings • Specialty Designed, Submerged Foot Valve with MaxFlo fluid passages and large ball check • SmartControl 2.0 Pressure Control • Digital Pressure Display • Tilt Back Cart Design • EasyOut Pump Filter <i>Refer Graco for typical materials sprayed</i>	

TexSpray Petrol Powered Texture Sprayers

	Part Number	Description	
	258734	GMAX II 5900 HD Airless Spray • 1 Gun to 0.043" Tip / 6.0 lpm / 3,300 psi • SmartControl Pressure Control • Digital Display • ProConnect System - No Tools Pump Removal/Replacement • Exclusive Advantage Drive System • Endurance Pump with Chromex Rod for longer life • Reliable 5.5 HP Honda Motor with Oil Alert	
	258735	GMAX II 7900 HD Airless Spray • 1 Gun to 0.048" Tip / 8.3 lpm / 3,300 psi • SmartControl Pressure Control • Digital Display • ProConnect System - No Tools Pump Removal/Replacement • Exclusive Advantage Drive System • Endurance Pump with Chromex Rod for longer life • Reliable 6.5 HP Honda Motor with Oil Alert	
	234113	TexSpray 1030 FC -Petrol • FlowControl System - Versatility • Automatic Pressure Dump System • 1030 FC Air Spray Gun • Integrated operation control panel includes both air and material controls c/w digital display • c/w Air Spray Gun, W' x 50ft Fluid Hose & W' x 50ft Air Hose • Material outputs from 3.4 to 11 .4 LPM Refer Graco for typical materials sprayed	
	245924	TexSpray Air Hopper Gun • Double handles give maximum support and control for ceilings, walls & floors! • Angled 5.7 litre Hopper Capacity • Exclusive Hopper Clamp -No tools needed to attach hopper to gun • c/w 3 x Nozzles (6mm, 8mm, 12mm)	

Texture Accessories

	Part Number	Description	
	248091	RTX 1500 Trigger Gun - <i>New TexSpray Non-Bleeder Texture Gun</i> (with threaded hose connection) • c/w Full range of fluid nozzle sizes 3,4,6,8,10 & 12mm	
	241705	More Texture Gun Options Mark V Heavy-Duty Texture Gun	
 Nozzles for 245924 Hopper Gun  Fine Finish Kit	234153 15C883 15C884 15C885 15C886 15C887 15C888 287227 235579 235580 235581	Texture Spray Nozzles <i>Spray Nozzle Kit For 245924 Hopper Gun:-</i> Includes one each of 4,6,8 & 12mm Nozzles <i>For RTX 1500, EXT & GTX 2000 Guns:-</i> 15C883 3mm Round Nozzle 15C884 4mm Round Nozzle 15C885 6mm Round Nozzle 15C886 8mm Round Nozzle 15C887 10mm Round Nozzle 15C888 12mm Round Nozzle Fine Finish Kit (includes fine finish adapter and 3 fan spray discs) <i>Fine Finish Texture Tips</i> Fine Finish Flat Tip Disc 3/16" Fine Finish Flat Tip Disc 1/4" Fine Finish Flat Tip Disc 3/8"	
	287304 287305 287306 287307 287328 248515	Clear Braided Hose Kits <i>RTX 1500, EXT & GTX 2000 Hose with Threaded Connections</i> 287304 1" x 25ft Fluid & 3/8" x 25ft Air Hose 287305 1" x 50ft Fluid & 3/8" x 50ft Air Hose 287306 1 1/4" x 25ft Fluid & 3/8" x 25ft Air Hose 287307 1 1/4" x 50ft Fluid & 3/8" x 50ft Air Hose External Air Kit (RTX 1500) Sponge Ball Clean-Out Kit (for 1" ID Hose)	



HVLP TurboForce™

Smart technology for easy spraying!

Graco's latest generation of HVLP sprayers was developed with only 1 objective in mind: **MAKE IT EASY**

Easy

HVLP spraying possible for everyone, the full professional, as well as the first time user. "Plug & Spray" we call it. Unpack your unit, fill your material cup, plug the unit and spray! To make it that EASY, we needed breakthrough solutions! The HVLP TurboForce sprayers have all the answers:

Automatic EDGE™ Gun (patent pending)

No more settings at the gun. Just pull the trigger and atomisation of the paint is managed automatically. The gun always chooses the best air/fluid ratio for the fan width you need.

TurboForce™

Finer finish with less (or no) material preparation. Less thinning means cost savings. Also reduces overspray drastically and allows you to spray an ever wider range of materials.

Quick release needles

Change your needles in seconds, without tools.



TurboForce™ Technology

Exclusive, proprietary turbine design resulting in **30% more performance*** at the gun

- More air flow and air pressure means higher production with less thinning
- Higher efficiency than standard turbines provides less energy use and longer life
- More performance means finer finish

* than previous models.

Utility Toolbox Design

- Stores gun, cup, power cord and supplies inside
- Separate top storage for extra needle and nozzle sets
- Durable design provides insulation for quieter operation

Super-Flex™ Air Hose

- Lighter and more flexible hose makes gun handling easier and less tiring.
- Easy connection knob



Materials & Applications

Graco's HVLP TurboForce turbines can be used on a daily basis. They were especially developed for the on-site contractor who sprays doors, trims, stair cases, small renovation jobs, fences, etc.

Ideal for detailed and controlled fine finish applications. For flawless spraying of dyes, inks, stains, epoxies, lacquers, varnishes, stains and multicolour.



HVLP TurboForce Sprayers

	Part Number	Description	
	256851	HVLP TurboForce 7.0 • 3-Stage Turbine with TurboForce Technology • 7.0 psi • HVLP AutomaticEdge Gun • 1 Litre Cup-Under • c/w No. #3 Fluid Sets • Dual Filtration -Pre -Filter and Automotive Filter • Filter Warning Light • 9m (30ft) Turbine Super-Flex Air Hose • Utility Toolbox design • 12.7 kg (Turbine Only)	
	256852	HVLP TurboForce 9.0 • 4-Stage Turbine with TurboForce Technology • 9.0 psi • HVLP AutomaticEdge Gun • 1 Litre Cup-Under • Air ball Valve included • c/w No. #3 & #4 Fluid Sets • Dual Filtration -Pre -Filter and Automotive Filter • Filter Warning Light • 9m (30ft) Turbine Super-Flex Air Hose • Utility Toolbox design • 13.2 kg (Turbine Only)	
	256853	HVLP TurboForce 9.5 • 5-Stage Turbine with TurboForce Technology • 9.5 psi • HVLP AutomaticEdge Gun • c/w Artisan Air Valve Kit • Air Ball Valve included • 1 Litre Cup-Under • c/w No.#2, #3 & #4 Fluid Sets • Dual Filtration -Pre -Filter and Automotive Filter • Filter Warning Light • 9m (30ft) Turbine Super-Flex Air Hose • 1.2m (4ft) Super-Flex Whip Hose • Utility Toolbox design • 13.6 kg (Turbine Only)	
	256854	HVLP TurboForce ProComp Pack • Powerful compressor pack attaches to any HVLP TurboForce Sprayer • Ability to separate the gun from the material cup for spraying in any direction • Simple installation, no tools required <i>Includes - Compressor, 0.9litre Remote Cup, Material & Air Hose and Shoulder Strap.</i>	

HVLP Sprayer Accessories

	Part Number	Description	
	257092	Automatic HVLP Edge Gun with #3 Fluid Set Integrated Flow Control -fluid, air & pattern in 1 location Adjustable Aircap - 3 positions Easy Glide 2-Finger Trigger Exclusive Quick Clean Check Valve Artisan Air Valve Accessory (Optional)	
	GUN ONLY NO POT! 256927	Artisan Air Valve Kit	
	256946	Nozzle / Needle Kits for EDGE HVLP Gun #2 Fluid Nozzle & Needle Set (0.8mm)	
	256947	#3 Fluid Nozzle & Needle Set (1.3mm)	
	256948	#4 Fluid Nozzle & Needle Set (1.8mm)	
	256949	#5 Fluid Nozzle & Needle Set (2.2mm)	
	256950	#6 Fluid Nozzle & Needle Set (2.5mm)	
	256951	Air Caps for EDGE HVLP Gun Edge HVLP gun air cap	
	241413	HVLP Material Hoses, Air Hoses and Filters Super-Flex Turbine Hose -9.0m (30ft)	
	257161	Super-Flex Whip Hose -1.2m (4ft)	
	240476	Black Material (fluid) Hose -9.0m (30ft)	
	240273	Turbine Air Filter - Mai	
	240274	Turbine Air Pre-Filter (5-Pack)	
	240267	Gun Inlet Material Strainers (3 Pack)	
	240065	Quick Disconnect Ball Valve	
	240069	2-Gun Y-Connector (F/M/M)	
	241423	High-Flex Air & Material Hose Set 30ft	
	244130	HVLP Cups (flat bottom), Pots and Misc. 1 Litre Cup with Lid Assembly	
	244131	1 Litre Cup with Storage Lid	
	240265	1 Litre Cup Gaskets (5-Pack)	
	240266	1 Litre Cup -Liners (40-Pack)	
	256956	QuickClean Check Valve (3 Pack)	
	244136	Gravity Cup Kit (500ml)	
	257098	1.0 Litre Remote Cup & 1.5mtr Fluid/Hose Set	
	287819	1.9 Litre Remote Cup & 1.5mtr Fluid/Hose Set	
	120126	1.9 Litre Remote Cup (Bottom Only)	
	M71425	1.9 Litre Cup Gaskets (Pkt 5)	
	112491	1.9 Litre Cup Liners (40 pack kit)	
	M70672	1.9 Litre Regulator & gauge kit	
	256961	HVLP Edge gun maintenance repair kit	
	256960	HVLP Edge gun repair kit	
	256953	Cleaning brush kit	
	256954	Deluxe Cleaning kit-includes detailed brushes, picks	
	256959	Remote cup shoulder strap	

Pre 2009

3800 & 4900 HVLP Sprayer Accessories

	Part Number	Description	
	244117	HVLP-Turbine Cup Gun with #3 Fluid Set Easy Access Controls - <i>fluid, air & pattern in 1 location</i> Quick-Change Needles / Nozzles - <i>No tools / adjustments!</i> One Air Cap for All Fluid Sets - <i>Highest quality spray</i> Exclusive Duckbill Valve - <i>easy to replace & maintain</i>	
	244122	Complete Nozzle Kit (2,4,5,6)	
	244123	Nozzle / Needle Kits for 2002 HVLP Gun #2 Fluid Nozzle & Needle Set (0.8mm)	
	244124	#3 Fluid Nozzle & Needle Set (1.3mm)	
	244125	#4 Fluid Nozzle & Needle Set (1.8mm)	
	244126	#5 Fluid Nozzle & Needle Set (2.2mm)	
	244127	#6 Fluid Nozzle & Needle Set (2.5mm)	
	244128	#7 Fluid Nozzle & Needle Set (2.8mm)	
	244226	Air Caps for 2002 HVLP Gun Fine Finish (standard on HVLP Turbine Guns)	
	244227	High Production, 16" fan pattern	
	241413	HVLP Material Hoses, Air Hoses and Filters High Flex Turbine Hose - 30ft	
	240476	Black Material (fluid) Hose - 30ft	
	240273	Turbine Air Filter - Main	
	240274	Turbine Air Pre-Filter (5-Pack)	
	240249	Cart Compressor Air Filters	
	240267	Gun Inlet Material Strainers (3 Pack)	
	240065	Quick Disconnect Ball Valve	
	240069	2-Gun V-Connector (F/M/M)	
	241423	High-Flex Air & Material Hose Set 30ft	
	244130	HVLP Cups (flat bottom), Pots and Misc. 1 Litre Cup with Lid Assembly	
	244131	1 Litre Cup with Storage Lid	
	244132	1 Litre Cup (cup only)	
	240265	1 Litre Cup Gaskets (5-Pack)	
	240266	1 Litre Cup - Liners (40-Pack)	
	244836	Cup Check valve Kit	
	244136	Gravity Cup Kit (500ml)	
	287819	1.9 Litre Remote Cup & 1.5mtr Fluid/Hose Set	
	120126	1.9 Litre Remote Cup (Bottom Only)	
	M71425	1.9 Litre Cup Gaskets (Pkt 5)	
	112491	1.9 Litre Cup Liners (40 pack kit)	
	M70672	1.9 Litre Regulator & Gauge Kit	
	M70616	10 Litre Pot - Buna Lid Gasket	
	244953	10 Litre Pot - Polyethylene Gaskets (3)	
	244133	Air Pressure Tubes (5-Pack)	
	244135	DuckBill CheckValve Kit (5-Pack)	
	M70702	Ford #4 Viscosity Cup	

AquaMax Direct-Drive Pressure Washers

	Part Number	Description	
	262318	AquaMax 2730 Pressure Washer • 2,700 psi / 10.2 lpm • GX 200cc OHV Honda Engine • 15 Metre non-marking HP Hose • Built-in Chemical Injector • Heavy-Duty Gun & Wand • c/w 4 x Spray Tips / 1 x Chemical Tip • 1 1/16" NPT Water Inlet • RotoBlast Head • Pressure Guage • Water Inlet Fitting • General Pump • Weighs 38.5kg	
	262320	AquaMax 3030 Pressure Washer • 3000 psi / 11.3 lpm • GX 270cc OHV Honda Engine • 15 Metre non-marking HP Hose • Built-in Chemical Injector • Heavy-Duty Gun & Wand • c/w 4 x Spray Tips / 1 x Chemical Tip • 1 1/16" NPT Water Inlet • General Pump • RotoBlast Head • Pressure Guage • Water inlet Fitting • Weighs 59 kg	
	262322	AquaMax 3540 Pressure Washer • 3,500 psi / 15.0 lpm • GX 390cc OHV Honda Engine • 15 Metre non-marking HP Hose • Built-in Chemical Injector • Heavy-Duty Gun & Wand • c/w 4 x Spray Tips / 1 x Chemical Tip • 1 1/16" NPT Water Inlet • RotoBlast Head • Pressure Guage • Water Inlet Fitting • General Pump • Weighs 64 kg	

AquaMax Belt-Drive Pressure Washers

	Part Number	Description	
	262314	Severe-Duty Hot Water Washer AquaMax 3540 Pressure Washer • 3,500 psi / 12.5 lpm • GX 390cc OHV Honda Engine • Built-in Chemical Injector • c/w 4 x Spray Tips / 1 x Chemical Tip • Diesel Fired Burner – Burner can run off of No. 1 or 2 diesel or kerosene, maximum temperature of 200 °F • AR RKV Series Pump – Direct drive triplex piston pump – built-in low pressure chemical injector, thermal relief valve protects the pump from over-temperature conditions • Professional-grade gun with insulated trigger and insulated dual lance • 50 foot 'non-marking' high pressure hose with quick connects, swivel and bend restrictors • Weighs 194 kg	
	262326	AquaMax 3030 Pressure Washer • 4000 psi / 16.0 LPM • 16.0 HP Briggs & Stratton Engine • c/w V-Twin Electric Start • 15 Metre non-marking HP Hose • Built-in Chemical Injector • Heavy-Duty Gun & Wand • c/w 4 x Spray Tips / 1 x Chemical Tip • 1 1/16" NPT Water Inlet • RotoBlast Head • Pressure Gauge • Water Inlet Fitting • General Pump • Weighs 109 kg	

AquaMax Belt-Drive Petrol-Powered Pressure Washers

	Part Number	Description	
	287643	Pressure Washer Accessories 287643 – Brass QR Hose (water) Fitting	
	198012	198012 – Rotating Tip – 3600 psi	
	198014	198014 – Rotating Tip – 5100 psi	
	198013	198013 – Oscillating Tip – 3600 psi	
	244784	244784 – Standard Gun	
	800429	800429 – Compensating Gun	
	118125	118125 – Hose 5/16" x 30ft (LD Units)	
	244783	244783 – Hose 3/8" x 50ft x 4000 psi	
	805***	805*** – Pressure Washer Tips (various)	
		Note: Recommendation on Replacement Tip Sizes Available on Request	



Graco LineDriver and LineDriver HD Ride-on system

Graco's NEW! LineDriver and LineDriver HD Ride-on Systems provide the most innovative, user-friendly ride-on systems for the professional linestripping contractor in the industry.

LineDriver



Exclusive ProStart™ Engine Starting System (HD Model)

- Up to 50% less pulling effort to start the engine -no more broken recoils
- Out performs manual pull and electric start systems when the weather starts turning cooler
- Patent pending design -only from Graco!

Exclusive Advanced Vibration Reduction System

- Proven system with LineLazer IV, now used on the LineDrivers to eliminate engine vibration.
- Eliminates user fatigue and helps keep line quality the best in the industry

Exclusive FlexBeam™ Break-A-Way Light System

- Fully adjustable for all types of low light applications
- Break-a-Way design helps protect costly repairs and keeps you on the job

LineDriverHD



Exclusive LineDriver & LineDriver HD Features

- Forward speeds to 10 mph (16km/h), reverse 6 mph (10km/h)
- Off set Parking Brake System
- "Cool Grey" operator seat -20% cooler than black seats
- "No Maintenance" HydroStatic Pump System
- "ALL -Terrain" smooth ride tires (HD Model)

FieldLazer Sports Field Striper




	Part Number	Description	
	248942	FieldLazer Sports Field Striper • 1.9 lpm / 900psi • 31 cc 4 stroke Honda • Weighs 36 kg • c/w 7.5mtr hose, SG2 Gun, RAC 5 Tip System	
 Gun Arm Extension Pictured	287022 287591 287584 249081	FieldLazer Accessories 30inch Tip Extension - for stencils FieldLazer Gun Arm Extension - to place the gun further forward for goal posts etc FieldLazer Cup Holder Accessory Adjustable Spray Shield kit	


LineLazer Airless Line Striper

	Part Number	Description	
	248861	LineLazer 3400 - 1 Gun Striper • 1 Gun to 0.027" Tip / 2.8 lpm /3,300psi • 4.0 HP Honda Motor with Oil Alert • Flow Through Easy Out Paint Filter • Easy Reach Controls • Handle Bar Design with Comfort Grips • Electronic Pressure Control • Swivel Front Wheel • Endurance Pump with Chromex Rod • Parking Brake • GMAX Advantage Drive System • Weighs 65 kg <i>c/w 1 Gun, Hose, Tips, etc. ready to go!</i>	

LineLazer IV Airless Line Stripers

	Part Number	Description	
	248863	LineLazer IV 3900 - 2Gun Striper • 1 Gun to 0.036 / 2 Guns to 0.025" • 4.7 lpm / 3,300 psi / 4.0 HP Honda • Advanced Vibration Reduction System • Rear Gun Mount for Straight Longer Lines • Light Weight Gun Holder • Flow Through Easy Out Paint Filter • Endurance Pump with Chromex Rod • Handle Bar Design • Dashboard Style Control Panel • Optional Light Kit pin 277061 • Weighs 96 kg <i>c/w 2 Guns, Tips, etc. ready to go!</i>	
	248867	LineLazer IV 5900 - 2Gun Striper • 1 Gun to 0.043/2 Guns to 0.029" • 6.0 lpm / 3,300 psi / 5.5 HP Honda • Advanced Vibration Reduction System • Rear Gun Mount for Straight Longer Lines • Light Weight Gun Holder • Flow Through Easy Out Paint Filter • Endurance Pump with Chromex Rod • Handle Bar Design • Dashboard Style Control Panel • Optional Light Kit pin 277061 • Weighs 105 kg <i>c/w 2 Guns, Tips, etc. ready to go!</i>	
	248871	LineLazer IV 200HS - 2Gun Striper • 1 Gun to 0.046 / 2 Guns to 0.033" • 7.5 lpm / 3,300 psi / 5.5 HP Honda • High Efficiency Hydraulic Motor • High Capacity Cooling System • Cooling Fan Design • Plus Same Features as LineLazer IV 5900 • Weighs 125 kg <i>c/w 2 Guns, Tips, etc. ready to go!</i>	
	262004	LineDriver - Ride-On Striping System • 5.5 HP commercial-grade Honda OHV engine • High quality, heavy-duty frame • 16" pneumatic tires • 1 7/8" quick release ball coupling • Weighs 111 kg	
	262005	LineDriver HD	
	277064	Complete EZ Bead System with 2 Dispensers	
	277065	Complete EZ Bead System with 1 Dispenser	
	245516	EZ Bead 12 inch Bead Dispenser	
	277066	EZ Bead Wind Deflector, 6 inch - 6pack	
	245520	EZ Bead Wind Deflector 12 inch - 3pack	
	277061	LineLazer IV Light Kit - (Non Auto Layout Only)	
	241104	15 Gallon (57 Litre) Hopper Accessory	
	277062	Short Pointer Guide -25 in. (63 cm)	
	277063	Long Pointer Guide -40 in. (102 cm)	
	249082	LineLazer Turf Kit (Non Auto Layout Only)	
	249083	LineDriver Turf Tyre Kit	

LineLazer IV Auto Layout Line Stripers

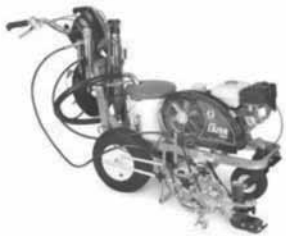
	Part Number	Description	
	253953	LineLazer IV 3900 - Auto Layout • 1 Gun to 0.036 / 2 Guns to 0.025" • 4.7 lpm / 3,300 psi / 4.0 HP Honda • Auto Layout System • Advanced Vibration Reduction System • Rear Gun Mount for Straight Longer Lines • Light Weight Gun Holder • Flow Through Easy Out Paint Filter • Endurance Pump with Chromex Rod • Handle Bar Design • Dashboard Style Control Panel • Weighs 96 kg <i>c/w 2 Guns, Tips, etc. ready to go!</i>	
	253954	LineLazer IV 5900 - Auto Layout • 1 Gun to 0.043/2 Guns to 0.029" • 6.0 lpm / 3,300 psi / 5.5 HP Honda • Auto Layout System • Advanced Vibration Reduction System • Rear Gun Mount for Straight Longer Lines • Light Weight Gun Holder • Flow Through Easy Out Paint Filter • Endurance Pump with Chromex Rod • Handle Bar Design • Dashboard Style Control Panel • Weighs 105 kg <i>c/w 2 Guns, Tips, etc. ready to go!</i>	
	253955	LineLazer IV 200HS - Auto Layout • 1 Gun to 0.046/2 Guns to 0.033" • 7.5 lpm / 3,300 psi / 5.5 HP Honda • Auto Layout System • High Efficiency Hydraulic Motor • High Capacity Cooling System • Cooling Fan Design • Plus Same Features as LineLazer IV 5900 • Weighs 125 kg <i>c/w 2 Guns, Tips, etc. ready to go!</i>	

Eliminate the hassle of manually laying out parking stalls and pre marking road lines with the new Auto-Layout LineLasers from Graco!

Auto-Layout LineLazer IV . . .


Take the pain out of layout!

- No more tape measures
- No more calculation errors
- No more guessing
- No more wasted energy
- No more missed opportunities

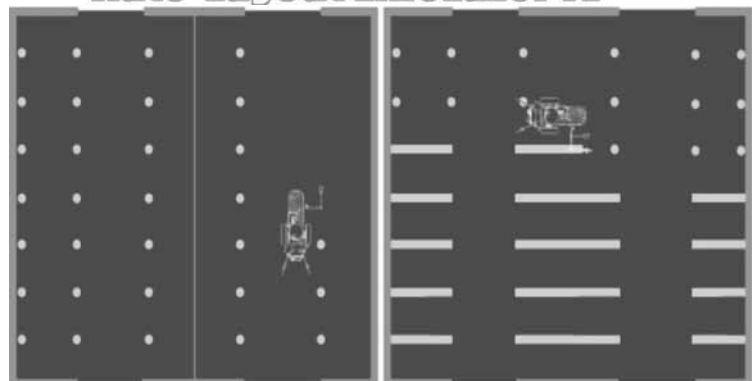

**Accurately Places
Layout Dots For You**

**Lets You Simply
Connect The Dots!**

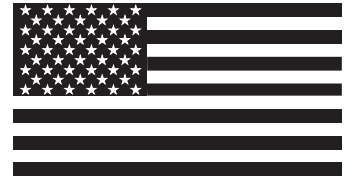

GrindLazer

Line Removal System

Graco introduces the 270, 390 and 480 GrindLazers as your total solution for all of your scarifier applications. Every Graco scarifier exceeds comparable competitive units in ease of use and quality. And with the EasyGlide™ Wheel Mount System you'll think that your using a LineLazer™! When choosing which Graco GrindLazer best fits your needs, you must consider what material you will be removing and how fast you want to complete the job. This guide will help walk you through this process and put you in the right GrindLazer. No matter what scarifier application you face, Graco has the **Total Job Solution** for you.

- **ProStart System** - The most rugged and reliable centrifugal clutch on the market which allows easy starting and disengagement of cutters
- **Dial Down Depth Control** - Allows precise cutting depths with a simple turn of the dial.
- **InstaCut Technology** - Allows the user maximum control for safely engaging the cutters both on and off without having to lift their hands of the handles.
- **EasyGlide Wheel Mount System** - Front mounted caster with dual rear pneumatic air-filled rear tyres makes handling as easy as a LineLazer.
- **TriBelt Drive System** - 3cog belt design optimizes power transfer and maximum load transfer
- The ability to add a LineDriver System to increase productivity and reduce fatigue





GrindLazer Line Removal System

1 Year Warranty

	Part Number	Description	
		GrindLazer 270 Line Removal System • Heavy Duty ProStart System • Dial Down Depth Control • EasyGlide Wheel Mount System • Tri-Belt Drive System • InstaCut Technology • Reliable 9.0 HP Honda Motor with Oil Alert	
	571018	GrindLazer 270 c/w 8" 8pt Flail Carbide Cutters	
	571021	GrindLazer 270 c/w 8" 6pt Miller Carbide Cutters	
		GrindLazer 390 Line Removal System • Heavy Duty ProStart System • Dial Down Depth Control • EasyGlide Wheel Mount System • Tri-Belt Drive System • InstaCut Technology • Reliable 13.0 HP Honda Motor with Oil Alert	
	571013	GrindLazer 390 c/w 10" 8pt Flail Carbide Cutters	
	571013	Grindlazer 390 c/w 10" 6pt Miller Carbide Cutters	
		GrindLazer 480 Line Removal System • Heavy Duty ProStart System • Dial Down Depth Control • EasyGlide Wheel Mount System • Tri-Belt Drive System • InstaCut Technology • Reliable 16.0 HP Vanguard Motor with Oil Alert	
	571008	GrindLazer 480 c/w 10" 8pt Flail Carbide Cutters	
	571023	GrindLazer 480 c/w 10" 6pt Miller Carbide Cutters <i>Note: This Model is not a Stock item</i>	
		LineDriver • Commercial-Grade Honda OHV motor • High quality, Heavy-duty frame • 16" Pneumatic Tyres • Quick Release ball Coupling	
	262004	LineDriver	
	262005	LineDriver HD	

Grindlazer Accessories

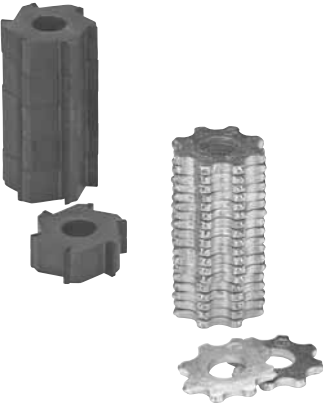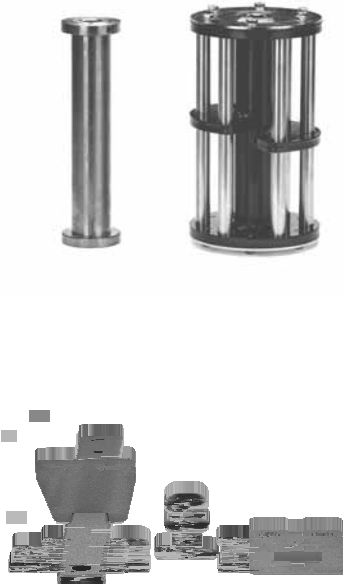	Part Number	Description	
	248957	Tungsten Cutter Assemblies 10" Flail Complete	
	240180	8" Flail Complete	
	240182	6" Flail Complete	
	240183	10" Miller Complete	
	240585	8" Miller Complete	
	240214	6" Miller Complete	
	240583	Diamond Blade Assemblies 10" Diamond Complete (480 Only)	
	248965	5" Diamond Complete (480 Only)	
		Replacement Parts / Accessories	
		Spacers	
	16A257	1/4" Diamond Spacer	
	16A258	1/8" Diamond Spacer	
	240981	20 Pack Steel Spacers	
		Cutters	
	240612	20 Pack Flail	
	240613	6 Pack Miller	
	24E289	Diamond Blade 5 pt	
		Drums	
	240610	Case Hard Drum	
	240982	Diamond Drum	
		Other	
	240984	25" Line Pointer	
	245321	Ball Hitch Kit - Use with LineDriver	

Graco Airless Accessories -RAC X Spray Tips

	Part Number	Description																																																																																																																																																																																																																																																																																																																																		
  	LTX***	RAC X Latex Reversible Spray Tips - Specialty Carbide - Up to 50% Longer Life - ALL RAC X Tips Maximum Working Pressure: 4050 psi																																																																																																																																																																																																																																																																																																																																		
		<table><tr><th colspan="26">ORIFICE SIZE - INCHES</th></tr><tr><th>IN</th><th>(MM)</th><th>.007</th><th>.009</th><th>.011</th><th>.013</th><th>.015</th><th>.017</th><th>.019</th><th>.021</th><th>.023</th><th>.025</th><th>.027</th><th>.029</th><th>.031</th><th>.033</th><th>.035</th><th>.037</th><th>.039</th><th>.041</th><th>.043</th><th>.045</th><th>.051</th><th>.055</th><th>.061</th><th>.065</th><th>.071</th></tr><tr><td>2-4 (51-102)</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>4-6 (102-152)</td><td>207</td><td></td><td>109</td><td>111</td><td>213</td><td>215</td><td>217</td><td>219</td><td>221</td><td></td><td>225</td><td>227</td><td></td><td>231</td><td></td><td>235</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>6-8 (152-203)</td><td></td><td></td><td>209</td><td>211</td><td>309</td><td>311</td><td>313</td><td>315</td><td>317</td><td>319</td><td>321</td><td>323</td><td>325</td><td>327</td><td>329</td><td>331</td><td>335</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>8-10 (203-254)</td><td></td><td></td><td>409</td><td>411</td><td>413</td><td>415</td><td>417</td><td>419</td><td>421</td><td>423</td><td>425</td><td>427</td><td>429</td><td>431</td><td>433</td><td>435</td><td></td><td>439</td><td>441</td><td>443</td><td>445</td><td>451</td><td>455</td><td>561</td><td></td><td></td></tr><tr><td>10-12 (254-305)</td><td></td><td></td><td>509</td><td>511</td><td>513</td><td>515</td><td>517</td><td>519</td><td>521</td><td>523</td><td>525</td><td>527</td><td>529</td><td>531</td><td>533</td><td>535</td><td>537</td><td>539</td><td>541</td><td>543</td><td>545</td><td>551</td><td>555</td><td>661</td><td>665</td><td>671</td></tr><tr><td>12-14 (305-356)</td><td></td><td></td><td></td><td>611</td><td>613</td><td>615</td><td>617</td><td>619</td><td>621</td><td>623</td><td>625</td><td>627</td><td>629</td><td>631</td><td>633</td><td>635</td><td>637</td><td>639</td><td>641</td><td>643</td><td>645</td><td>651</td><td>655</td><td></td><td></td><td></td></tr><tr><td>14-16 (356-406)</td><td></td><td></td><td></td><td></td><td></td><td></td><td>817</td><td>819</td><td>821</td><td></td><td></td><td>827</td><td></td><td></td><td>831</td><td>833</td><td>835</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>16-18 (406-XXX)</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>Flow Rate (gpm)</td><td></td><td>.05</td><td>.09</td><td>.12</td><td>.18</td><td>.24</td><td>.31</td><td>.38</td><td>.47</td><td>.57</td><td>.67</td><td>.77</td><td>.90</td><td>1.03</td><td>1.17</td><td>1.31</td><td>1.47</td><td>1.63</td><td>1.8</td><td>1.98</td><td>2.17</td><td>2.79</td><td>3.25</td><td>4.0</td><td>4.53</td><td>5.41</td></tr><tr><td>Flow Rate (lpm)</td><td></td><td>.20</td><td>.33</td><td>.49</td><td>.69</td><td>.91</td><td>1.17</td><td>1.47</td><td>1.79</td><td>2.15</td><td>2.54</td><td>2.96</td><td>3.42</td><td>3.90</td><td>4.42</td><td>4.98</td><td>5.56</td><td>6.18</td><td>6.83</td><td>7.51</td><td>8.23</td><td>10.57</td><td>12.29</td><td>15.12</td><td>17.17</td><td>20.48</td></tr></table> Water @ 2000 psi, 138 bar, 13.8 MPa -paints with a higher viscosity will decrease the flow rate Example: for a tip with a 0.15 orifice and a 6 in (152 mm) pattern, order LIX315.	ORIFICE SIZE - INCHES																										IN	(MM)	.007	.009	.011	.013	.015	.017	.019	.021	.023	.025	.027	.029	.031	.033	.035	.037	.039	.041	.043	.045	.051	.055	.061	.065	.071	2-4 (51-102)																											4-6 (102-152)	207		109	111	213	215	217	219	221		225	227		231		235											6-8 (152-203)			209	211	309	311	313	315	317	319	321	323	325	327	329	331	335										8-10 (203-254)			409	411	413	415	417	419	421	423	425	427	429	431	433	435		439	441	443	445	451	455	561			10-12 (254-305)			509	511	513	515	517	519	521	523	525	527	529	531	533	535	537	539	541	543	545	551	555	661	665	671	12-14 (305-356)				611	613	615	617	619	621	623	625	627	629	631	633	635	637	639	641	643	645	651	655				14-16 (356-406)							817	819	821			827			831	833	835										16-18 (406-XXX)																											Flow Rate (gpm)		.05	.09	.12	.18	.24	.31	.38	.47	.57	.67	.77	.90	1.03	1.17	1.31	1.47	1.63	1.8	1.98	2.17	2.79	3.25	4.0	4.53	5.41	Flow Rate (lpm)		.20	.33	.49	.69	.91	1.17	1.47	1.79	2.15	2.54	2.96	3.42	3.90	4.42	4.98	5.56	6.18	6.83	7.51	8.23	10.57	12.29	15.12	17.17
ORIFICE SIZE - INCHES																																																																																																																																																																																																																																																																																																																																				
IN	(MM)	.007	.009	.011	.013	.015	.017	.019	.021	.023	.025	.027	.029	.031	.033	.035	.037	.039	.041	.043	.045	.051	.055	.061	.065	.071																																																																																																																																																																																																																																																																																																										
2-4 (51-102)																																																																																																																																																																																																																																																																																																																																				
4-6 (102-152)	207		109	111	213	215	217	219	221		225	227		231		235																																																																																																																																																																																																																																																																																																																				
6-8 (152-203)			209	211	309	311	313	315	317	319	321	323	325	327	329	331	335																																																																																																																																																																																																																																																																																																																			
8-10 (203-254)			409	411	413	415	417	419	421	423	425	427	429	431	433	435		439	441	443	445	451	455	561																																																																																																																																																																																																																																																																																																												
10-12 (254-305)			509	511	513	515	517	519	521	523	525	527	529	531	533	535	537	539	541	543	545	551	555	661	665	671																																																																																																																																																																																																																																																																																																										
12-14 (305-356)				611	613	615	617	619	621	623	625	627	629	631	633	635	637	639	641	643	645	651	655																																																																																																																																																																																																																																																																																																													
14-16 (356-406)							817	819	821			827			831	833	835																																																																																																																																																																																																																																																																																																																			
16-18 (406-XXX)																																																																																																																																																																																																																																																																																																																																				
Flow Rate (gpm)		.05	.09	.12	.18	.24	.31	.38	.47	.57	.67	.77	.90	1.03	1.17	1.31	1.47	1.63	1.8	1.98	2.17	2.79	3.25	4.0	4.53	5.41																																																																																																																																																																																																																																																																																																										
Flow Rate (lpm)		.20	.33	.49	.69	.91	1.17	1.47	1.79	2.15	2.54	2.96	3.42	3.90	4.42	4.98	5.56	6.18	6.83	7.51	8.23	10.57	12.29	15.12	17.17	20.48																																																																																																																																																																																																																																																																																																										
 	WR****	RAC X WideRAC Wide Track Spray Tips 24" Fan Pattern - Get the Job Done in Half the Time																																																																																																																																																																																																																																																																																																																																		
		<table><tr><th colspan="12">ORIFICE SIZE - INCHES</th></tr><tr><th>IN</th><th>(MM)</th><th>.021</th><th>.023</th><th>.025</th><th>.027</th><th>.029</th><th>.031</th><th>.033</th><th>.035</th><th>.037</th><th>.039</th></tr><tr><td>24 (610)</td><td></td><td>1221</td><td>1223</td><td>1225</td><td>1227</td><td>1229</td><td>1231</td><td>1233</td><td>1235</td><td>1237</td><td>1239</td></tr><tr><td>Flow Rate (gpm)</td><td></td><td>.47</td><td>.57</td><td>.67</td><td>.77</td><td>.90</td><td>1.03</td><td>1.17</td><td>1.31</td><td>1.47</td><td>1.63</td></tr><tr><td>Flow Rate (lpm)</td><td></td><td>1.79</td><td>2.15</td><td>2.54</td><td>2.96</td><td>3.42</td><td>3.90</td><td>4.42</td><td>4.98</td><td>5.56</td><td>6.18</td></tr></table> Water @ 2000 psi, 138 bar, 13.8 MPa -paints with a higher viscosity will decrease the flow rate Example: for a tip with a 0.27 orifice and a 24 in (305 mm) pattern, order WR1227.	ORIFICE SIZE - INCHES												IN	(MM)	.021	.023	.025	.027	.029	.031	.033	.035	.037	.039	24 (610)		1221	1223	1225	1227	1229	1231	1233	1235	1237	1239	Flow Rate (gpm)		.47	.57	.67	.77	.90	1.03	1.17	1.31	1.47	1.63	Flow Rate (lpm)		1.79	2.15	2.54	2.96	3.42	3.90	4.42	4.98	5.56	6.18																																																																																																																																																																																																																																																																						
ORIFICE SIZE - INCHES																																																																																																																																																																																																																																																																																																																																				
IN	(MM)	.021	.023	.025	.027	.029	.031	.033	.035	.037	.039																																																																																																																																																																																																																																																																																																																									
24 (610)		1221	1223	1225	1227	1229	1231	1233	1235	1237	1239																																																																																																																																																																																																																																																																																																																									
Flow Rate (gpm)		.47	.57	.67	.77	.90	1.03	1.17	1.31	1.47	1.63																																																																																																																																																																																																																																																																																																																									
Flow Rate (lpm)		1.79	2.15	2.54	2.96	3.42	3.90	4.42	4.98	5.56	6.18																																																																																																																																																																																																																																																																																																																									
 	FFT***	RAC X Fine Finish Reversible Spray Tips Dual Orifice Tip optimized for fine finish with light viscosity coatings (latex & oil base enamels, stain, varnish, lacquer & industrial finishes)																																																																																																																																																																																																																																																																																																																																		
		<table><tr><th colspan="6">ORIFICE SIZE - INCHES</th></tr><tr><th>IN</th><th>(MM)</th><th>.008</th><th>.010</th><th>.012</th><th>.014</th></tr><tr><td>2-4 (51-102)</td><td></td><td>108</td><td>110</td><td>112</td><td></td></tr><tr><td>4-6 (102-152)</td><td></td><td>208</td><td>210</td><td>212</td><td>214</td></tr><tr><td>6-8 (152-203)</td><td></td><td>308</td><td>310</td><td>312</td><td>314</td></tr><tr><td>8-10 (203-254)</td><td></td><td></td><td>410</td><td>412</td><td>414</td></tr><tr><td>10-12 (254-305)</td><td></td><td></td><td>510</td><td>512</td><td>514</td></tr><tr><td>12-14 (305-356)</td><td></td><td></td><td></td><td>612</td><td>614</td></tr><tr><td>Flow Rate (gpm)</td><td></td><td>.07</td><td>.11</td><td>.15</td><td>.21</td></tr><tr><td>Flow Rate (lpm)</td><td></td><td>.26</td><td>.41</td><td>.59</td><td>.80</td></tr></table> Water @ 2000 psi (138 bar, 13.8 MPa) - paints with a higher viscosity will decrease the flow rate Example: for a tip with a .010 orifice and a 8 in (203 mm) pattern, order FFT410	ORIFICE SIZE - INCHES						IN	(MM)	.008	.010	.012	.014	2-4 (51-102)		108	110	112		4-6 (102-152)		208	210	212	214	6-8 (152-203)		308	310	312	314	8-10 (203-254)			410	412	414	10-12 (254-305)			510	512	514	12-14 (305-356)				612	614	Flow Rate (gpm)		.07	.11	.15	.21	Flow Rate (lpm)		.26	.41	.59	.80																																																																																																																																																																																																																																																																						
ORIFICE SIZE - INCHES																																																																																																																																																																																																																																																																																																																																				
IN	(MM)	.008	.010	.012	.014																																																																																																																																																																																																																																																																																																																															
2-4 (51-102)		108	110	112																																																																																																																																																																																																																																																																																																																																
4-6 (102-152)		208	210	212	214																																																																																																																																																																																																																																																																																																																															
6-8 (152-203)		308	310	312	314																																																																																																																																																																																																																																																																																																																															
8-10 (203-254)			410	412	414																																																																																																																																																																																																																																																																																																																															
10-12 (254-305)			510	512	514																																																																																																																																																																																																																																																																																																																															
12-14 (305-356)				612	614																																																																																																																																																																																																																																																																																																																															
Flow Rate (gpm)		.07	.11	.15	.21																																																																																																																																																																																																																																																																																																																															
Flow Rate (lpm)		.26	.41	.59	.80																																																																																																																																																																																																																																																																																																																															
	246215 246437	RAC X Hand-Tight Tip Guards - Blue Colour matches new RAC X Tip - Locking Tab - Tip snaps into spray & reverse position - Aerodynamic design directs the material flow - virtually eliminating paint build up on inside of guard - Easy turn design of guard allows you to change the spray orientation from vertical to horizontal without loosening the nut! Time Saver!																																																																																																																																																																																																																																																																																																																																		
		To Suit Graco / Titan 7/8" Thread To Suit Wagner / Airlessco 11/16" Thread																																																																																																																																																																																																																																																																																																																																		
	246453	RAC X One Seal Kit - 5 Pack Use only with RAC X Tip & Guard Note: Every Graco Tip comes complete with OneSeal in packaging. Use this Kit if further spares are required.																																																																																																																																																																																																																																																																																																																																		
	248936	RAC X One Seal Solvent Kit																																																																																																																																																																																																																																																																																																																																		

Graco Airless Accessories- RAC 5 Spray Tips


	Part Number	Description																																																																																																																																																																																																																																																																																															
	286***	RAC 5 Reversible Spray Tips • Arrow shaped, Black ergonomic handle • Maximum Working Pressure: 4050 psi • Fits Orange Body																																																																																																																																																																																																																																																																																															
		ORIFICE SIZE - INCHES <table><tr><th>IN</th><th>(MM)</th><th>.007</th><th>.009</th><th>.011</th><th>.013</th><th>.015</th><th>.017</th><th>.019</th><th>.021</th><th>.023</th><th>.025</th><th>.027</th><th>.029</th><th>.031</th><th>.033</th><th>.035</th><th>.039</th><th>.043</th><th>.045</th><th>.051</th><th>.055</th><th>.063</th><th>.065</th></tr><tr><td>2-4</td><td>(51-102)</td><td></td><td>109</td><td>111</td><td>113</td><td>115</td><td></td><td>119</td><td>121</td><td>223</td><td>225</td><td></td><td></td><td>331</td><td></td><td>235</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>4-6</td><td>(102-152)</td><td>207</td><td>209</td><td>211</td><td>213</td><td>215</td><td>217</td><td>219</td><td>211</td><td>323</td><td>325</td><td>327</td><td></td><td></td><td></td><td>433</td><td>435</td><td>439</td><td>443</td><td></td><td>451</td><td>455</td><td></td></tr><tr><td>6-8</td><td>(152-203)</td><td>307</td><td>309</td><td>311</td><td>313</td><td>315</td><td>317</td><td>319</td><td>321</td><td>323</td><td>325</td><td>327</td><td>429</td><td>531</td><td>533</td><td>535</td><td></td><td>543</td><td></td><td>551</td><td>555</td><td>563</td><td></td></tr><tr><td>8-10</td><td>(203-254)</td><td></td><td>409</td><td>411</td><td>413</td><td>415</td><td>417</td><td>419</td><td>421</td><td>423</td><td>425</td><td>427</td><td>529</td><td>629</td><td>631</td><td>633</td><td>635</td><td></td><td>645</td><td></td><td>655</td><td></td><td></td></tr><tr><td>10-12</td><td>(254-305)</td><td></td><td>509</td><td>511</td><td>513</td><td>515</td><td>517</td><td>519</td><td>521</td><td>523</td><td>525</td><td>527</td><td>629</td><td>729</td><td></td><td>735</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>12-14</td><td>(305-356)</td><td></td><td>609</td><td>611</td><td>613</td><td>615</td><td>617</td><td>619</td><td>621</td><td>623</td><td>625</td><td>627</td><td>729</td><td></td><td>831</td><td>833</td><td>835</td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>14-16</td><td>(356-406)</td><td></td><td></td><td></td><td></td><td>815</td><td>817</td><td>819</td><td>821</td><td>723</td><td>725</td><td></td><td>827</td><td></td><td></td><td>935</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>16-18</td><td>(406-457)</td><td></td><td></td><td></td><td></td><td></td><td>917</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>18-20</td><td>(457-508)</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>Flow Rate (gpm)</td><td></td><td>.05</td><td>.09</td><td>.12</td><td>.18</td><td>.24</td><td>.31</td><td>.38</td><td>.47</td><td>.57</td><td>.67</td><td>.77</td><td>.90</td><td>1.03</td><td>1.17</td><td>1.31</td><td>1.63</td><td>1.98</td><td>2.17</td><td>2.79</td><td>3.25</td><td>4.26</td><td>4.53</td></tr><tr><td>Flow Rate (lpm)</td><td></td><td>.20</td><td>.33</td><td>.49</td><td>.69</td><td>.91</td><td>1.17</td><td>1.47</td><td>1.79</td><td>2.15</td><td>2.54</td><td>2.96</td><td>3.42</td><td>3.90</td><td>4.42</td><td>4.98</td><td>6.18</td><td>7.51</td><td>8.23</td><td>10.57</td><td>12.29</td><td>16.13</td><td>17.17</td></tr></table> Water @ 2000 psi (138 bar, 13.8 MPa) - paints with a higher viscosity will decrease the flow rate Example: for a tip with a .011 orifice and a 6 in (152 mm) pattern, order 286311	IN	(MM)	.007	.009	.011	.013	.015	.017	.019	.021	.023	.025	.027	.029	.031	.033	.035	.039	.043	.045	.051	.055	.063	.065	2-4	(51-102)		109	111	113	115		119	121	223	225			331		235								4-6	(102-152)	207	209	211	213	215	217	219	211	323	325	327				433	435	439	443		451	455		6-8	(152-203)	307	309	311	313	315	317	319	321	323	325	327	429	531	533	535		543		551	555	563		8-10	(203-254)		409	411	413	415	417	419	421	423	425	427	529	629	631	633	635		645		655			10-12	(254-305)		509	511	513	515	517	519	521	523	525	527	629	729		735								12-14	(305-356)		609	611	613	615	617	619	621	623	625	627	729		831	833	835							14-16	(356-406)					815	817	819	821	723	725		827			935								16-18	(406-457)						917																	18-20	(457-508)																							Flow Rate (gpm)		.05	.09	.12	.18	.24	.31	.38	.47	.57	.67	.77	.90	1.03	1.17	1.31	1.63	1.98	2.17	2.79	3.25	4.26	4.53	Flow Rate (lpm)		.20	.33	.49	.69	.91	1.17	1.47	1.79	2.15	2.54	2.96	3.42	3.90	4.42	4.98	6.18	7.51	8.23	10.57	12.29	16.13
IN	(MM)	.007	.009	.011	.013	.015	.017	.019	.021	.023	.025	.027	.029	.031	.033	.035	.039	.043	.045	.051	.055	.063	.065																																																																																																																																																																																																																																																																										
2-4	(51-102)		109	111	113	115		119	121	223	225			331		235																																																																																																																																																																																																																																																																																	
4-6	(102-152)	207	209	211	213	215	217	219	211	323	325	327				433	435	439	443		451	455																																																																																																																																																																																																																																																																											
6-8	(152-203)	307	309	311	313	315	317	319	321	323	325	327	429	531	533	535		543		551	555	563																																																																																																																																																																																																																																																																											
8-10	(203-254)		409	411	413	415	417	419	421	423	425	427	529	629	631	633	635		645		655																																																																																																																																																																																																																																																																												
10-12	(254-305)		509	511	513	515	517	519	521	523	525	527	629	729		735																																																																																																																																																																																																																																																																																	
12-14	(305-356)		609	611	613	615	617	619	621	623	625	627	729		831	833	835																																																																																																																																																																																																																																																																																
14-16	(356-406)					815	817	819	821	723	725		827			935																																																																																																																																																																																																																																																																																	
16-18	(406-457)						917																																																																																																																																																																																																																																																																																										
18-20	(457-508)																																																																																																																																																																																																																																																																																																
Flow Rate (gpm)		.05	.09	.12	.18	.24	.31	.38	.47	.57	.67	.77	.90	1.03	1.17	1.31	1.63	1.98	2.17	2.79	3.25	4.26	4.53																																																																																																																																																																																																																																																																										
Flow Rate (lpm)		.20	.33	.49	.69	.91	1.17	1.47	1.79	2.15	2.54	2.96	3.42	3.90	4.42	4.98	6.18	7.51	8.23	10.57	12.29	16.13	17.17																																																																																																																																																																																																																																																																										
	LL5***	RAC 5 LineLazer Reversible Spray Tips Creates clean, laser-sharp lines with no fuzzy edges or thin spots. Row Shaped Yellow Handle Maximum Working Pressure: 4050 psi																																																																																																																																																																																																																																																																																															
		ORIFICE SIZE - INCHES <table><tr><th>IN</th><th>(MM)</th><th>.013</th><th>.015</th><th>.017</th><th>.019</th><th>.021</th><th>.023</th><th>.025</th><th>.027</th><th>.029</th><th>.031</th><th>.033</th><th>.035</th><th>.039</th><th>.055</th></tr><tr><td>2</td><td>(51)</td><td>213</td><td>215</td><td>217</td><td>219</td><td>321</td><td>323</td><td>325</td><td>327</td><td>329</td><td>331</td><td>333</td><td>335</td><td></td><td>355</td></tr><tr><td>4</td><td>(102)</td><td></td><td>315</td><td>317</td><td>319</td><td>421</td><td>423</td><td>425</td><td>427</td><td>429</td><td>431</td><td></td><td>435</td><td></td><td></td></tr><tr><td>4-8</td><td>(102-204)</td><td></td><td></td><td>417</td><td>419</td><td>621</td><td>623</td><td>625</td><td>627</td><td>629</td><td>631</td><td></td><td>635</td><td>639</td><td></td></tr><tr><td>8-12</td><td>(204-305)</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>Flow Rate (gpm)</td><td></td><td>.18</td><td>.24</td><td>.31</td><td>.38</td><td>.47</td><td>.57</td><td>.67</td><td>.77</td><td>.90</td><td>1.03</td><td>1.17</td><td>1.31</td><td>1.63</td><td>3.25</td></tr><tr><td>Flow Rate (lpm)</td><td></td><td>.69</td><td>.91</td><td>1.17</td><td>1.47</td><td>1.79</td><td>2.15</td><td>2.54</td><td>2.96</td><td>3.42</td><td>3.90</td><td>4.42</td><td>4.98</td><td>6.18</td><td>12.29</td></tr></table> Line Width Water @ 2000 psi (138 bar, 13.8 MPa) - paints with a higher viscosity will decrease the flow rate Example: for a tip with a .015 orifice and a 4 in (102 mm) pattern, order LL5215. Fan width of a spray pattern is measured at 6 in (152 mm) from the surface	IN	(MM)	.013	.015	.017	.019	.021	.023	.025	.027	.029	.031	.033	.035	.039	.055	2	(51)	213	215	217	219	321	323	325	327	329	331	333	335		355	4	(102)		315	317	319	421	423	425	427	429	431		435			4-8	(102-204)			417	419	621	623	625	627	629	631		635	639		8-12	(204-305)															Flow Rate (gpm)		.18	.24	.31	.38	.47	.57	.67	.77	.90	1.03	1.17	1.31	1.63	3.25	Flow Rate (lpm)		.69	.91	1.17	1.47	1.79	2.15	2.54	2.96	3.42	3.90	4.42	4.98	6.18	12.29																																																																																																																																																																															
IN	(MM)	.013	.015	.017	.019	.021	.023	.025	.027	.029	.031	.033	.035	.039	.055																																																																																																																																																																																																																																																																																		
2	(51)	213	215	217	219	321	323	325	327	329	331	333	335		355																																																																																																																																																																																																																																																																																		
4	(102)		315	317	319	421	423	425	427	429	431		435																																																																																																																																																																																																																																																																																				
4-8	(102-204)			417	419	621	623	625	627	629	631		635	639																																																																																																																																																																																																																																																																																			
8-12	(204-305)																																																																																																																																																																																																																																																																																																
Flow Rate (gpm)		.18	.24	.31	.38	.47	.57	.67	.77	.90	1.03	1.17	1.31	1.63	3.25																																																																																																																																																																																																																																																																																		
Flow Rate (lpm)		.69	.91	1.17	1.47	1.79	2.15	2.54	2.96	3.42	3.90	4.42	4.98	6.18	12.29																																																																																																																																																																																																																																																																																		
	243161	RAC 5 HandTite Performance Series Guard No tools required to assemble guard on gun! Reliably seals when tightened by hand (<i>no leaks!</i>) Aluminum nut won't rust or corrode Features proven Performance Series DripLess™ Guard Duckbill (<i>virtually eliminates paint build-up and dripping</i>)																																																																																																																																																																																																																																																																																															
	243263																																																																																																																																																																																																																																																																																																
	243281	RAC 5 Seal Kit - 5Pack OneSeal™ for ALL paints and fluids - compatible with the full range of paints and solvents Note: Every Graco Tip comes complete with OneSeal in packaging. Use this Kit if further spares are required. Use only with RAC 5 Tip & Guard!																																																																																																																																																																																																																																																																																															
	XHD***	Heavy-Duty RAC Reversible Spray Tip Rec. for filled materials that cause tip plugging such as high solids coatings and fibrous mastics Maximum Working Pressure: 5000 psi Grey Handle / Tip Held in by Screw for Safety.																																																																																																																																																																																																																																																																																															
	XHD001	Heavy-Duty RAC Tip Guard Extra Large Tip Guard for Heavier Coatings Use only with XHD*** Heavy-Duty RAC Tips																																																																																																																																																																																																																																																																																															

General Surfaces Tip Recommendations Chart

Surfaces	Materials	Filter Mesh	Fan Width (in.) at 12 in.				Orifice Size (in.)
			6-8	8-10	10-12	12-14	
Wood Interior Cabinets, Panelling	Stain, Sanding, Sealer Lacquer, Varnish Shellac	100	•	•			.011
			•	•			.013
Interior Walls or Ceilings Drywall, Plaster	Latex, Vinyl, Acrylic	60		•	•	•	.015
				•	•	•	.017
				•	•	•	.019
Overhang	Primers, Enamels	60	•	•	•		.015
				•	•		.017
						•	.019
Masonry Block, Stucco, Concrete	Vinyl, Acrylic, Latex, Epoxy, Alkyds	60		•	•		.017
					•		.019
					•	•	.021
Wood Exterior Shingle, Siding, Shiplap	Exterior Stains, Latex, Vinyl, Acrylic	60			•		.017
					•		.019
					•	•	.021
Open Joist and Ceiling Areas	Mil White, Hi Builds	60			•		.019
					•	•	.021
					•		.023

Worn tips Waste Paint - Cost Money!

- Text tip fan pattern daily
- Replace worn tips
- Select correct tip for the job
- See other side for tip & filter sizes

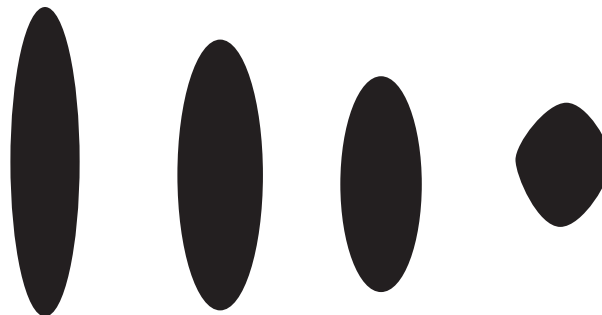

SPRAY WIDTH PATTERN

12 in. (305 mm)	11 in. (280 mm)	9 in. (229 mm)	5.5 in. (280 mm)
New 515 Tip	worn to .017	worn to .019	worn to .021

FLOW RATE

1/4 gpm (.87 lpm)	1/3 gpm (1.14 lpm)	3/8 gpm (1.4 lpm)	1/2 gpm (1.74 lpm)
----------------------	-----------------------	----------------------	-----------------------



GRACO Form No. 301-968

Effects of Tip Wear

When the tip wears, the size of the tip orifice increases and the fan width decreases, ultimately affecting the spray pattern. If the fan size has lost 25% of its original size, then it is time to replace the spray tip. Continuing to spray would simply result in a poor quality spray job, plus a substantial waste of paint and labor, on average he will spray 20% additional paint and use an additional 20% of labor. The chart above illustrates the effects of a worn tip on a spray pattern.

The Contractor and FTx Guns featuring the exclusive FlexSeal™ Needle Design.

Graco's Contractor and FTx airless spray guns are designed to be the longest-lasting guns on the market and continue to be the #1 choice of painting contractors.



Contractor Gun




Contractor FTx Gun

- **Exclusive FlexSeal™ Needle** Design eliminates exposure to fluid and extends needle life by 70%
- **Ergonomic Contractor Gun Handle** - form-fitted to provide maximum control and comfort while spraying.
- **Durable Nickel Finish** is corrosion resistant and easier to clean
- **Modular Needle Cartridge** – easiest guns to service on the market
- **Maximum pressure of 3600 psi** provides superior atomization of wide variety of coatings

These guns feature breakthrough needle design technology that **extends needle life by 70%!** The new patent-pending **FlexSeal™** design totally encloses the needle to reduce wear and provides better material flow through the gun.

**Exclusive
FlexSeal**



Graco Airless Accessories - Airless Spray Guns

	Part Number	Description	
	288420	Contractor Gun c/w 517 RAC X Tip Exclusive FlexSeal™ Needle Design eliminates exposure to fluid and extends needle life by 70%. Ergonomic Contractor Gun Handle Form-fitted to provide maximum control and comfort while spraying. Durable Nickel Finish Is corrosion resistant and easier to clean. Modular Needle Cartridge Easiest guns to service on the market. Maximum pressure of 3600 psi Provides superior atomization of wide variety of coatings.	
	288430	FTx Gun c/w 515 RAC X Tip • Features as per Contractor II Gun • 3,600 psi Max. Working Pressure • New diffuser seat design - continual sealing as seat wears	
	288489	Contractor Gun / Hose Kit 1/4" x 50' • c/w 288420 Gun, 50ft x 1/4" Airless Hose & Whip Hose	
	288490	Contractor Gun / Hose Kit 3/8" x 50' • c/w 288420 Gun, 50ft x 3/8" Airless Hose & Whip Hose	
	288493	FTx Gun / Hose Kit • c/w 288430 Gun and 50ft x 1/4" Airless Hose	
	287032 287033 287034	Contractor / FTx Gun Filters (2008) • Inside Out Filtering - no more springs or supports needed! • No more collapsed filters! 60 Mesh Easy Out Filter (Black) 100 Mesh Easy Out Filter (Blue) Twin Pack 60/100 Mesh EasyOut Filter	
	288488 287031	Contractor / FTx Gun Repair Kit (2008) Needle Assembly Contractor II / FTx II Gun Repair Kit Needle Assembly • Easier to repair gun - no adjustments needed!	

Graco Airless Accessories - Airless Spray Guns

	Part Number	Description	
	243012	SG3 Gun c/w 515 RAC 5 Tip - Economical gun ideal for limited use applications. - Features include a 4-finger trigger with thumb lock and safety, a built-in filter in the handle to reduce clogs, and an all metal body with plastic back cap and trigger lock. - The SG3 gun features a built-in hose swivel connection for easier spraying. - Use Standard 218-070 Contractor Gun Kit. - The SG3 gun is also rated at 3600 psi. <i>Replaces old 243012 Model with RAC IV Tip</i>	
	246240	Silver Plus Gun c/w 517 RAC X Tip - Known for its durability and long life -Silver Plus Gun offers a comfortable handle design - There are no adjustments required for the needle assembly / backed by an unconditional guarantee against needle breakage. - The stainless steel fluid tube and increased pressure rating make it a great gun for more viscous coating materials. - Maximum Working Pressure: 5000 psi	
	287823	Silver Plus Fine Finish Kit c/w 246240 Gun, RAC X FFT²1 FFT312, 3/16" x 25' (7.5mtr) Airless Hose, 10" extension, inline gun filter kit with 2 x 100 mesh filters, solvent tip seals and cleaning brush.	
	287095	Flex Plus Gun c/w 517 RAC X Tip - Airless Hose connects directly to the gun through a spring guard mount on the handle base - Maximum Working Pressure: 5000 psi	
Gun Filters <i>Pre-2003 Models</i> 	218131 218133 224455 224456	Contractor / FTx / SG3 Gun Filters Pre-2003 Model Contractor / FTx Guns & SG3 Gun Gun Filter Assembly, 50 Mesh - 1 per Card Gun Filter Assembly, 100 Mesh - 1 per Card Gun Filter Screen Element, 50 Mesh - 2 per Card Gun Filter Screen Element, 100 Mesh - 2 per Card	
Gun Repair Kits	218070 236494 235474 218143 235475	Gun Repair Kit for Pre-2003 Model Contractor / FTx Guns and current SG3 Gun / Contractor In-Line Valve Heavy Duty (Longer Life) Gun Repair Kit for Pre-2003 Model Contractor / FTx Guns Gun Repair Kit for Silver Plus & Flex Plus Guns Gun Repair Kit for old-style Silver & Flex Guns Gun Repair Kit for Silver Gun	

Graco Airless Accessories - Extended Reach Tools

	Part Number	Description	
	287023	Pole Gun - 3ft - Features New RAC X Tip System (517 Tip) - Includes CleanShot Shut-Off Valve & Contractor In-Line Valve - Max. Working Pressure: 3600 psi	
	287024	Pole Gun - 6ft	
	287030	CleanShot Shut-Off Valve - Features New RAC X Tip System (517 Tip) - Shuts fluid flow off at the tip for a clean, crisp pattern - no spitting 180 deg tip swivel for ultimate versatility - Pressure-Actuated - Operates at a min. 700 psi	
	244162	Repair Kit - Shut-Off Valve	
	244363	Repair Kit - CleanShot Swivel	
	244161	Contractor In-Line Valve - clw in-handle gun filter & built-in Hose Swivel - Can be used with other Extended Reach Tools - Max. Working Pressure: 3600 psi	
		Pole Gun Extensions - Use with the Contractor In-Line Valve and CleanShot Shut-Off Valve to create different length pole guns 7/8" thread gun nut (fits Graco or Titan guns)	
	244163 244164	3ft Pole Gun Extension 6ft Pole Gun Extension	
		Tip Extensions - clw RAC X Tip Guard (Tip not included) 7/8" thread gun nut (fits Graco or Titan guns) - Use 181085 Gun Adapter to fit 11/16" Wagner	
	287019	10" (25cm) Extension	
	287020	15" (38cm) Extension	
	287021	20" (50cm) Extension	
	287022	30" (75cm) Extension	
	15H622	Gasket - Non-metallic	
	181085	Adapter - 7/8 x 11/16 to fit onto Wagner	
Tough, Lightweight Aluminium Construction 7/8" Gun Nut	232121	Heavy-Duty Extensions 10" (25cm) HD Extension	
	232122	20" (50cm) HD Extension	
	232123	40" (100cm) HD Extension	
	232124	60" (150cm) HD Extension	
	232125	80" (200cm) HD Extension	

Graco Airless Accessories – Pressure Roller Frame/Covers

	Part Number	Description	
PRESSURE ROLLER KITS 		9" (229mm) Pressure Roller Assemblies with EVENFLOW Frame System • Standard with 7/8" Graco or Titan Gun Nut to Fit • Contractor In-Line Valve (244161) • Order 45deg Adapter (224399) to increase comfort if used with Airless Gun • Includes 9" x 3/8" Nap Roller Cover • Max. Working Pressure: 3600psi • Typical pressure roller Applications require 300psi	
	244279	9" Roller Assy with 20" (50cm) Extension c/w FREE 45deg Gun Angle Adapter	
	244281	244281 with 18" to 36" (46cm to 91cm) Telescoping Extension	
	245397	9" Roller Assy with 20" (50cm) Fixed Extension & Contractor In-Line Valve	
	224399	Gun Angle Adapter 45 deg	
	244271	EVENFLOW Pressure Roller Frames 9" EvenFlow Roller Frame c/w 7/8" Thread. <i>Use with Graco Heavy Duty Extensions</i>	
	244623	9" EvenFlow Roller Frame with 1/8" npt thread. <i>Use with Graco Telescoping Extensions</i>	
	224398	Adapts Roller Frame 244623 to use with Heavy Duty Extension Roller Covers	
	107589	9" Roller Cover – 3/8" (10mm) Nap	
	107590	9" Roller Cover – 1/2" (13mm) Nap	
	107591	9" Roller Cover – 3/4" (19mm) Nap	
	107592	9" Roller Cover – 1 1/4" (32mm) Nap	
		12" (305mm) Geospace Pressure Rollers <i>Note: Not EvenFlow Design as per 9"</i>	
	240055	12" Roller Frame	
	186944	12" Roller Cover – 1/2" (13mm) Nap	
	186945	12" Roller Cover – 3/4" (19mm) Nap	
	186946	12" Roller Cover – 1 1/4" (32mm) Nap	
	224399	Gun Angle Adapter 45 deg	
		Telescoping Extensions • Use Telescoping Extensions for Pressure rolling Only – Do Not Use for Airless Spraying • All Telescoping Extensions include Adapter 244825 – For use with 7/8" Contractor In-Line Valve	
	218775	18" to 36" (45cm to 90cm)	
	218776	36" to 72" (90cm to 180cm)	
	218777	72" to 144" (180cm to 360cm)	


Graco Airless Accessories - Hoses, Fittings & Fluids

	Part Number	Description	
 	238358	Airless High Pressure Hose - Whip <i>3/16" x 3ft (0.91 mtr) Whip Hose (M x F)</i>	
	238959	<i>3/16" x 5ft (1.5mtr) Whip Hose (M x F)</i>	
		Blue Max li Airless Hose	
	214981	<i>3/16" x 15ft (4.6m) Airless Hose (FBE)</i>	
	214698	<i>3/16" x 25ft (7.5m) Airless Hose (FBE)</i>	
	214697	<i>3/16" x 50ft (15m) Airless Hose (FBE)</i>	
	240793	<i>1/4" x 25ft (8mtr) Airless Hose (FBE)</i>	
	240794	<i>1/4" x 50ft (15m) Airless Hose (FBE)</i>	
	223771	<i>1/4" x 100ft (30m) Airless Hose (FBE)</i>	
	240796	<i>3/8" x 25ft (7.5m) Airless Hose (FBE)</i>	
	240797	<i>3/8" x 50ft (15m) Airless Hose (FBE)</i>	
	241275	<i>3/8" x 100ft (30m) Airless Hose (FBE)</i>	
	277251	<i>1/2" x 50ft (15m) Airless Hose (FBE)</i>	
	240296	Hose Straps - 4Pack	
		Hose Joiners	
		Use to connect hoses or components of the same or different sizes (156971 common hose joiner)	
	156971	1/4" x 1/4" - MBE (7500 psi Max)	
	156849	3/8" x 3/8" - MBE (6000 psi Max)	
	158491	1/2" x 1/2" - MBE (6700 psi Max)	
	157350	1/4" x 3/8" - MBE (5000 psi Max)	
	159239	1/2" x 3/8" - MBE (5000 psi Max)	
ADAPTERS (Using Graco Accessories on Wagner / Airlessco Guns)	181085	Adapters Converts 11/16" (Wagner I Airlessco) Thread Size to Graco 7/8" Thread Size. Use when placing Graco Extensions, etc. on Competitor Guns. Use with 223373 Tip Gasket.	
 	206994	Throat Seal Liquid (tsl)	
	206995	Prevents paints from drying onto the displacement rod and packings and extends pump life	
		8 oz. (235ml) Bottle	
		1 Quart (950 ml) Bottle	
		PUMP ARMOR	
		Protects pump for storage	
	243103	1 Quart (1 ltr) Bottle	
	245133	1 Gallon (3.8 ltrs) Bottle	

Graco Airless Accessories - Manifold Filters/Inlet Strainers

	Part Number	Description	
MANIFOLD FILTERS		EASY OUT FILTERS -SHORT	
	246425	For use with 2003 Model Ultra 395/495 Short, Grey, Vertical, 30 Mesh -1 per card	
	246384	Short, Black, Vertical, 60 Mesh -1 per card	
	246382	Short, Blue, Vertical, 100 Mesh -1 per card	
	246383	Short, Red, Vertical, 200 Mesh -1 per card	
	243080	For use with ST PRO, STX & 190ES where filter fitted) Short, Black, Horizontal, 60 Mesh -1 per card	
	243081	Short, Blue, Horizontal, 100 Mesh -1 per card	
		EASY OUT FILTERS -LONG	
	244071	For use with Ultra Max (I & II), GMax & HydraMax Long, Grey, Vertical, 30 Mesh -1 per card	
	244067	Long, Black, Vertical, 60 Mesh -1 per card	
	244068	Long, Blue, Vertical, 100 Mesh -1 per card	
	244069	Long, Red, Vertical, 200 Mesh -1 per card	
		STANDARD FILTERS - SHORT	
	236496	For use with old model 390/395ST & 490/49ST, etc. Acrylic Filter Screen, 60 Mesh - 2 per card	
	236497	Enamel Filter Screen, 100 Mesh - 2 per card	
	236498	Stain Filter Screen, 200 Mesh - 2 per card	
		STANDARD FILTERS - LONG	
	224459	For use with old model Ultra, EM, GM, etc. Models Acrylic Filter Screen, 60 Mesh - 2 per card	
	224468	Enamel Filter Screen, 100 Mesh - 2 per card	
	224469	Stain Filter Screen, 200 Mesh - 2 per card	
		INLET STRAINERS - (1 per Card)	
	189920	Ultra Max II Sprayers 695, 795 & 1095	
	246385	Ultra 395/495/595, Ultra Max 695 Lo-Boy (Pre 2003) Gmax 3400, LineLazer3400	
	235004	STX, 395 ST PRO, 495 ST PRO Lo-Boy, Ultra Max 695/795 Lo-Boy, 390/395/490/495ST Stand Units	
	183770	495 ST PRO Hi-Boy, Ultra Max 695 Hi-Boy (Pre 2003), Ultra 750 Lo-Boy, GM3000 Hi-Boy, LineLazer 3000, Ultra 500 Hi-Boy, LineLazer 3500 Units	
	181072	Ultra Max 795/1095/1595 Hi-Boy (Pre 2007), GMax 3900/5900 Hi-Boy & Lo-Boys, All LineLazer 3900/5900 & 200HS, Ultra 750/1000/1595 Hi-Boys, GM3500/GM5000 HiBoy & Lo-Boys	
	181073	Ultra 500 Lo-Boy, Ultra 400 and EM390/490	
	243083	190 ES Only!	
	288472	Crush proof Inlet Screen (GH & EH Models)	
	288480	Crush proof Inlet Net (GH & EH Models)	

Graco Airless Accessories - Pump Repair Kits

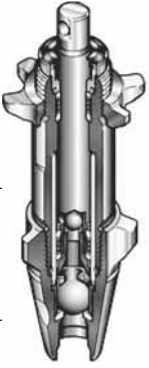	Part Number	Description	
Pump Repair Kit	248212	UltraMax II 695/795, UltraMax 795/1095, GMax II 3900, GMax 3900, LineLazer 3900	
	248213	Ultra Max II 1095, Ultra Max 1595, GMax II 5900, GMax 5900/10000, LineLazer 5900, Mark V	
Pump Repair Kit	243091	190ES & ST	
 Pump/ Fluid Section	244194	390, UltraMax II 490/495/595, STX, Ultra 395/495/595, UltraMax 695 (2003), 395/495 ST PRO, STX, FinishPro 390&395 GMax 3400, LineLazer 3400	
	246341	GMax 7900, GH200/230/300 LineLazer 200HS	
	287835	GH833	
Pump Repair Kit	235703	390st / 395st / 490st / 495st / GM3000	
Pump Repair Kit	222587	EM380/390/490, Ultra 400/500	
Pump Repair Kit	222588	EM590, Ultra 433/750/1000, GM3500	
Pump Repair Kit	220877	Ultra 1500, GM5000, EM5000	
Pump Repair Kit	249123	GMaxII Max Life	
Pump Repair Kit	287813	GH200/230/300	
Pump Repair Kit	288471	GH130	