




AIRLESS PAINT SPRAYERS



HEAVY-DUTY PRESSURE WASHERS

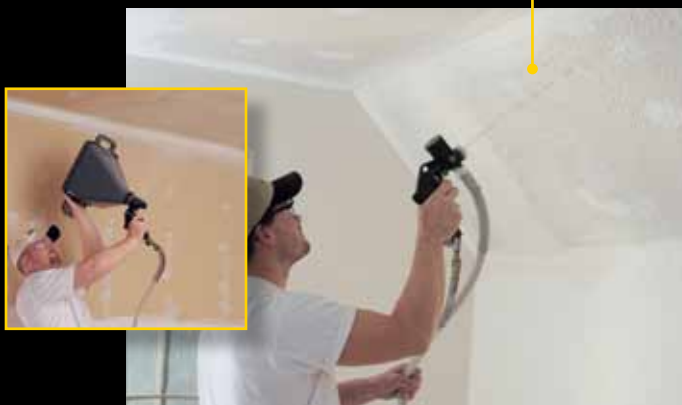

TEXTURE SPRAYERS



TACKLE ANY JOB WITH CONFIDENCE!

Airless Tip Selection

From state-of-the-art features to our color-coded tip handles, we make spray tips easier to use and select. Plus, we provide the technology to give you durable, reliable accessories that delivers a consistent spray pattern for a variety of materials.

- Patented diffuser allows atomization at lower pressures, reducing tip wear and extending tip life
- Pinned handle resists twisting and breakage
- Reversible for easy cleaning
- Liquid-honed for long life and double-tested to ensure accurate spray pattern and flow rate
- Highest-quality carbide tip produces longer useable life
- Color-coded handles for easy identification

ASM's color-coded tip handle and corresponding tip selection guide make it simple to select the right orifice and fan pattern for your painting application. Follow the steps below for easy tip selection.

Spray Tip Application Guide

- 1 - Identify the surface you will be spraying
- 2 - Choose your coating
- 3 - Determine your spray pattern width
[spraying 12 in (30.5 cm) from the surface]
- 4 - Follow chart to tip number

Tip handles are color-coded by orifice (tip hole) size for easy identification on the job site.

	Red — 200 Mesh, For Varnishes and Lacquers
	Yellow — 100 Mesh, For Enamels and Stains
	White — 50 Mesh, For Latex
	Green — 30 Mesh, For Heavy-Bonded Paints

How to Determine Spray Tip Size:

EXAMPLE:
 $\#5 = 1/2 \text{ Fan Width or } 2 \times 5 = 10 \text{ Inch Fan}$

517

#17 Orifice is diameter of opening in thousandths

Surface	Coating	Fan Width in Inches	Grey .009	Red .011	Orange .013	Yellow .015	Blue .017	Green .019	Purple .021	Brown .023	Black .025	Black .027	Black .029	Black .031	Black .035	Black .045	Black .061	Filter Mesh Color Code
Wood Interiors,	Lacquer, Varnish, Shellac	2 in																
		4 in	209	211														
		6 in	309	311														
		8 in	409	411	413													
		10 in	509	511	513													
		12 in	609		613													
	Alkyd Stain, Alkyd Enamel, Sanding Sealer	4 in		211	213													
		6 in		311	313													
		8 in		411	413	415												
		2 in			113	115												
		4 in		211	213	215												
		6 in			313	315												
Interior Walls, Ceilings, Drywall	Latex, Vinyl, Acrylic	8 in				415	417	419										
		10 in				515	517	519										
		12 in				615	617	619	621	623								
		2 in			113	115												
		4 in			213	215	217											
		6 in				315	317	319										
	Primer, Enamel, Latex, Acrylic	8 in				415	417	419										
		10 in				515	517	519										
		12 in				615	617	619										
		6 in																
		8 in				415	417	419	421	423								
		10 in				515	517	519	521	523								
Masonry, Block, Stucco, Concrete	Vinyl, Oil Base, Alkyd	12 in				615	617	619	621	623								
		16 in					617	619										
	Latex, Acrylic	8 in					417	419	421	423								
		10 in					517	519	521	523								
		12 in					617	619	621	623								
		6 in																
	Smooth Elastomeric	8 in					419	421	423	425	327	427	429	431	435			
		10 in					519	521	523	525	527			531	535			
		12 in					619	621	623	625				631	635	645	661	
		16 in													835			
Wood Exteriors, Shingle Siding, Shiplap	Exterior Stain	6 in				315												
		8 in				415	417											
		10 in				515	517	519										
		12 in					617	619										
	Vinyl, Acrylic, Latex	6 in				315												
		8 in				415	417	419	421									
		10 in					517	519	521									
		12 in					617	619	621									
	Mil White High Build	6 in				315	317	319	321									
		8 in					417	419	421									
		10 in					517	519	521									
		12 in						619	621									
Open Joists Ceiling Areas RIB Deck Ceilings	Dry Fall	6 in				315	317											
		8 in				415	417	419	421	423	425							
		10 in					517	519	521	523	525							
		12 in							621	623	625							

Universal Reversible Spray Tips

- The Uni-Tip™ is universal with major brands, including Titan™, SprayTECH®, Graco® RAC® IV and RAC 5 and Airlessco®. Not compatible with Graco RAC X™, ASM Super-Zip™ or Zip-Tip™.
 - Best quality carbide tip means a superior spray pattern and a longer useable fan pattern life
 - The color-coded handle makes it easy to identify the tip size on the job
 - Each tip individually tested for consistent fan and orifice size
 - One-piece Uni-Tip seal means fewer parts on hand
 - Uni-Tip seal is compatible with the full range of paints and solvents
 - Pinned Handle resists twisting and breakage
 - Nib on handle for seal replacement
- Part # **69-XXX**



Striping Uni-Tip

- Specifically manufactured to provide crisp, clean edges
 - Available in all common striping tip sizes
- Part # **69xxxST**

Fine-Finish Uni-Tip

- All the features of the Uni-Tip Plus, double orifice gives greater break-up of fine-finish materials
 - Provides the finest atomization and a high-quality finish
 - Up to 85% transfer efficiency
- Part # **69-FFXXX**

Uni-Tip Hand-Tight Base/Guard (Tip not included)

- Aluminum won't rust
 - Virtually eliminates paint buildup and dripping
 - Easy no-tools assembly
 - Quickly change from horizontal to vertical spray pattern
- Part # **248200** "G" thread is 7/8" (22 mm)
Part # **249303** "F" thread is 11/16" (17 mm)



Uni-Tip Seal

- Easily installs without tools!
- Part # **248228** (5-pack)



Standard Uni-Tips (69-XXX)

Fan Width in Inches	Grey .009	Red .011	Orange .013	Yellow .015	Blue .017	Green .019	Purple .021	Brown .023	Black .025	Black .027	Black .029	Black .031	Black .035	Black .045	Black .061
2 in			113	115											
4 in	209	211	213	215	217	219	221								
6 in	309	311	313	315	317	319	321			327					
8 in	409	411	413	415	417	419	421	423	425	427	429	431	435		
10 in	509	511	513	515	517	519	521	523	525	527		531	535		
12 in	609		613	615	617	619	621	623	625			631	635	645	661
16 in													835		

Striping Uni-Tips (69XXXST)

Fan Width in Inches	Yellow .015	Blue .017	Green .019	Purple .021	Black .027
4 in	215	217			
6 in	315	317	319	321	327
8 in		417			
10 in		517			
12 in	615	617			

Fine Finish Uni-Tips (69-FFXXX)

Fan Width in Inches	Red .011	Orange .013	Yellow .015	Blue .017	Green .019
4 in	211	213	215		
6 in	311	313	315		
8 in	411	413	415		
10 in		513		517	
12 in					619

AIRLESS TIP SELECTION

Super-Zip

Reversible Spray Tips

- Liquid-honed and double-tested to ensure an accurate spray pattern
 - Patented diffusion chamber for superior atomization
 - Color-coded tip handles for easy selection
 - Reversible to quickly clear tip clogs
- Part # 59-xxx



Striping Super-Zips

- Specifically manufactured to provide crisp, clean edges
 - Available in all common striping tip sizes (213, 215, 315, 217, 317, 417, 219, 319, 419, 321, 421, 621, 323, 623, 625, 327, 627)
- Part # 59xxxST

Fine-Finish Super-Zips

- Double orifice gives greater break-up of fine-finish materials
 - Provides the finest atomization and a high-quality finish
 - Up to 85% transfer efficiency
- Part # 59FFXX-XXX



Fine-Finish Super Zips							
09	111	211	311	411	511	611	711
11	113	213	313	413	513	613	713
13	115	215	315	415	515	615	715
15	117	217	317	417	517	617	717
17	119	219	319	419	519	619	719
19	121	221	321	421	521	621	—

Super-Zip Hand-Tight Base/Guard

- Hand-Tight Base – no tools required!
 - Patented Cartridge Seal is compatible with all materials, will last through multiple tips and is spring-loaded for easy tip insertion and removal
 - Patented safety tab design locks for safe tip reversing when unclogging tip
 - Available to fit all makes of guns
- Part # 5901-F Fits "F" thread size - 11/16 in (17 mm)
Part # 5901-G Fits "G" thread size - 7/8 in (22 mm)



Super-Zip Cartridge Seals

- Replace Cartridge Seals quickly, without tools
 - No loose gaskets
- Part # 5907 Hand-Tight Cartridge Seal

Super-Zip Selection Guide

FAN WIDTH IN INCHES	GREY .009 0.08	FILTER	RED .011 0.12	FILTER	ORANGE .013 0.17	FILTER	YELLOW .015 0.23	FILTER	BLUE .017 0.30	FILTER	GREEN .019 0.36	FILTER	PURPLE .021 0.46	FILTER	BROWN .023 0.55	FILTER	BLACK .025 0.66	FILTER	BLACK .027 0.77	FILTER	BLACK .029 0.88	FILTER
2 in	•		111		113		115		117		119		121		•		•		•		•	
4 in	209		211		213		215		217		219		221		•		•		•		•	
6 in	309		311		313		315		317		319		321		323		325		327		•	
8 in	409		411		413		415		417		419		421		423		425		427		429	
10 in	•		511		513		515		517		519		521		523		525		527		529	
12 in	•		611		613		615		617		619		621		623		625		627		629	
14 in	•		•		•		715		717		719		721		723		725		•		729	
16 in	•		•		813		815		817		819		821		823		•		827		829	
18 in	•		•		•		915		917		•		921		•		925		•		•	

FAN WIDTH IN INCHES	BLACK .031 1.02	FILTER	BLACK .033 1.16	FILTER	BLACK .035 1.31	FILTER	BLACK .039 1.62	FILTER	BLACK .041 1.79	FILTER	BLACK .043 1.98	FILTER	BLACK .045 2.16	FILTER	BLACK .047 2.36	FILTER	BLACK .049 2.57	FILTER	BLACK .051 2.81	FILTER	BLACK .053 3.00	FILTER
2 in	•		•		•		•		•		•		•		•		•		•		•	
4 in	•		•		•		•		•		•		•		•		•		•		•	
6 in	331		333		335		339		•		•		•		•		•		•		•	
8 in	431		433		435		439		441		443		445		447		449		451		453	
10 in	531		533		535		539		541		543		545		547		549		551		553	
12 in	631		633		635		639		641		643		645		647		649		651		653	
14 in	731		733		735		739		741		743		745		747		749		751		753	
16 in	831		833		835		839		•		•		•		•		•		•		•	
18 in	931		933		935		939		•		•		•		•		•		•		•	

REFERENCE

- COLOR
- ORIFICE SIZE
- GPM / FLOW



- Green 30 Mesh
- White 50 Mesh
- Yellow 100 Mesh
- Red 200 Mesh

Flat Tip Systems

Standard Flat Tips

- Flat Tips are universal and fit all makes of Flat Tip Bases
Part # **90-xxx**



Flat Tip Base/Guard

- Flat Tip Bases are universal and are available to fit all makes of guns
- Accommodates Flat Tip-n-Gasket (**93-xxx**) and Standard Flat Tips (**90-xxx**)
Part # **420-F** Fits "F" thread size - 11/16 in (17 mm)
Part # **420-G** Fits "G" thread size - 7/8 in (22 mm)
- Separate tip gasket available in tubes of eight (8)
Part # **401-8**



Flat Tip Selection Guide

FAN WIDTH IN INCHES	.007 0.04	FILTER	.009 0.08	FILTER	.011 0.12	FILTER	.013 0.17	FILTER	.015 0.23	FILTER	.017 0.30	FILTER	.019 0.36	FILTER	.021 0.46	FILTER	.023 0.55	FILTER
2 in	•		109	•	111	•	113	•	115	•	117	•	119	•	121	•	123	•
4 in	207		209	•	211	•	213	•	215	•	217	•	219	•	221	•	223	•
6 in	307		309	•	311	•	313	•	315	•	317	•	319	•	321	•	323	•
8 in	407		409	•	411	•	413	•	415	•	417	•	419	•	421	•	423	•
10 in	•		509	•	511	•	513	•	515	•	517	•	519	•	521	•	523	•
12 in	•		609	•	611	•	613	•	615	•	617	•	619	•	621	•	623	•
14 in	•		•	•	•	•	•	•	715	•	717	•	719	•	721	•	723	•
16 in	•		•	•	•	•	813	•	815	•	817	•	819	•	821	•	823	•
18 in	•		•	•	•	•	•	•	•	•	917	•	•	•	921	•	•	•

REFERENCE
 ----- ORIFICE SIZE
 ----- GPM / FLOW

FAN WIDTH IN INCHES	.025 0.66	FILTER	.027 0.77	FILTER	.029 0.88	FILTER	.031 1.02	FILTER	.033 1.16	FILTER	.035 1.31
2 in	•		•		•		•		•		•
4 in	•		227		•		•		•		235
6 in	325		327		•		331		•		•
8 in	425		427		429		431		433		435
10 in	525		527		529		531		533		535
12 in	625		627		629		631		633		635
14 in	725		•		729		•		•		735
16 in	•		827		829		831		833		835
18 in	925		•		•		•		•		935

FAN WIDTH IN INCHES	FILTER	.039 1.62	FILTER	.043 1.98	FILTER	.045 2.16	FILTER	.051 2.81	FILTER	.055 3.17	FILTER
2 in	•	•	•	•	•	•	•	•	•	•	•
4 in	•	•	•	•	•	•	•	•	•	•	•
6 in	•	•	•	•	•	•	•	•	•	•	•
8 in	•	439	•	•	•	•	451	•	•	•	•
10 in	•	•	543	•	•	•	•	•	•	•	•
12 in	•	•	•	645	•	•	•	655	•	•	•
14 in	•	•	•	•	•	•	•	•	•	•	•
16 in	•	•	•	•	•	•	•	•	•	•	•
18 in	•	•	•	•	•	•	•	•	•	•	•



THREAD SIZE ON DIFFUSER "F" = 11/16 "G" = 7/8

Guns

500 Series Professional Airless Spray Gun

The ASM 500 Contractor Gun is new and designed for durability, spraying performance and a long life (Includes 517 Uni-Tip and Guard)

- Lightweight gun with easy trigger pull
- Heavy-duty swivel allows easy gun movement
- Split handle for easy filter removal
- Available "G" thread only
- Maximum working pressure 3600 psi (24.8 MPa, 248 bar)

Part # **289316** 2-Finger Gun with Uni-Tip

Part # **288681** 4-Finger Gun with Uni-Tip

Repair Kit # **288817**



400 Series Professional Airless Spray Gun

Improved! Life of the 400 Series gun before repair is equal to or better than that of competitive guns (Includes 517 Uni-Tip and Guard)

- Heavy-duty swivel allows easy gun movement
- Anodized body resists corrosion
- Split handle for easy access to filter
- Available with "F" and "G" diffusers to match all systems
- Maximum working pressure 3600 psi (24.8 MPa, 248 bar)

Part # **248240** 2-Finger Gun with Uni-Tip ("G" thread only)

Part # **456-SF, 456-SG** 2-Finger Gun with Super-Zip

Part # **248239** 4-Finger Gun with Uni-Tip ("G" thread only)

Part # **451-SF, 451-SG** 4-Finger Gun with Super-Zip

Repair Kit # **4427-F, 4427-G**



300 Series Professional Airless Spray Gun

Improved! New needle design for reduced spitting and long life (Includes 517 Uni-Tip and Guard)

- Available with "F" and "G" diffusers to match all systems
- Maximum working pressure 3600 psi (24.8 MPa, 248 bar)

Part # **248238** 2-Finger Gun with Uni-Tip ("G" thread only)

Part # **356-SF, 356-SG** 2-Finger Gun with Super-Zip Tip

Part # **248237** 4-Finger Gun with Uni-Tip ("G" thread only)

Part # **351-SF, 351-SG** 4-Finger Gun with Super-Zip Tip

Repair Kit # **3027-F, 3027-G**



200 Series Airless Spray Gun

Easy-access in-handle paint filter reduces tip clogging and improves finish (Includes 515 Uni-Tip and Guard)

- Comfortable 4-Finger Trigger
- Ideal for small projects
- Maximum working pressure 3600 psi (24.8 MPa, 248 bar)

Part # **251-U** 4-Finger Gun with Uni-Tip

Part # **251-SG** 4-Finger Gun with Super-Zip Tip

Not repairable



Combo Gun

- Well-balanced, lightweight, comfortable handle and trigger
 - In-handle gun filter and internal trigger lock
 - Add a Mini Pole or Maxi Pole for extra reach
- Part # **248241** with 517 Uni-Tip and Uni-Tip Hand-Tight Base ("G" thread only)
- Part # **6700-SF, 6700-SG** with 517 Super-Zip and Super-Zip Hand-Tight Base
- Repair Kit # **6727-F, 6727-G**



Hose

Airless Hose

- 3300 psi (22.7 MPa, 227 bar) rating
- Swivel couplers and spring guards on both ends
- Can be coupled with other airless hose
- Female fitting ends.

Part # **HSE1450** 1/4 in (6.4 mm) x 50 ft (15 m)

Part # **HSE3850** 3/8 in (9.5 mm) x 50 ft (15 m)

Part # **245449** 1/4 in (6.4 mm) x 25 ft (7.5 m)



Whip Hose

- Whip Hoses add flexibility and reduce operator fatigue

Part # **HSE3163** 3 ft (0.9 m) x 3/16 in (4.8 mm) (MXF)

Part # **HSE3165** 5 ft (1.5 m) x 3/16 in (4.8 mm) (MXF)



Gun Hose Kits

- 500 Series Contractor Gun with Uni-Tip, Hand-Tight Base and 1/4 in (6.4 mm) x 50 ft (15 m) Airless Hose ("G" thread only)
Part # **256244** (4-Finger)
Part # **256245** (2-Finger)
- 400 Series Professional Gun with Uni-Tip, Uni-Tip Hand-Tight Base and 1/4 in (6.4 mm) x 50 ft (15 m) Airless Hose
Part # **248249** ("G" thread only) (4-Finger)
Part # **248250** ("G" thread only) (2-Finger)
- 400 Series Professional Gun with Super-Zip, Hand-Tight Base and 1/4 in (6.4 mm) x 50 ft (15 m) Airless Hose
Part # **451-SHF** ("F" thread), **451-SHG** ("G" thread) (4-Finger)
Part # **456-SHF** ("F" thread), **456-SHG** ("G" thread) (2-Finger)
- 300 Series Contractor Gun with Super-Zip, Hand-Tight Base and 1/4 in (6.4 mm) x 50 ft (15 m) Airless Hose
Part # **351-SHF** ("F" thread), Part # **351-SHG** ("G" thread) (4-Finger)
Part # **356-SHF** ("F" thread), Part # **356-SHG** ("G" thread) (2-Finger)



Gun and Hose Connectors

Part # **4410** 3/8 in (npt) x 3/8 in (npt) MBE

Part # **4413** 1/4 in (npt) x 1/4 in (npt) Hex Nipple MBE

Part # **4414** 1/4 in (npt) x 3/8 in (npt) MBE

Part # **162485** 3/8 in (npt) x 3/8 in (npsm) MBE



Part # **239663** 1/4 in (npt)(M) x 1/4 in (npsm)(F) Swivel

Hose Cover

- 4 mil poly protects your airless hose from paint and abrasion damage. Comes in 1000 ft roll with perforations every 50 ft

Part # **865696** ASM Hose Cover Roll

Part # **867610** ASM Hose Case of 6 Rolls

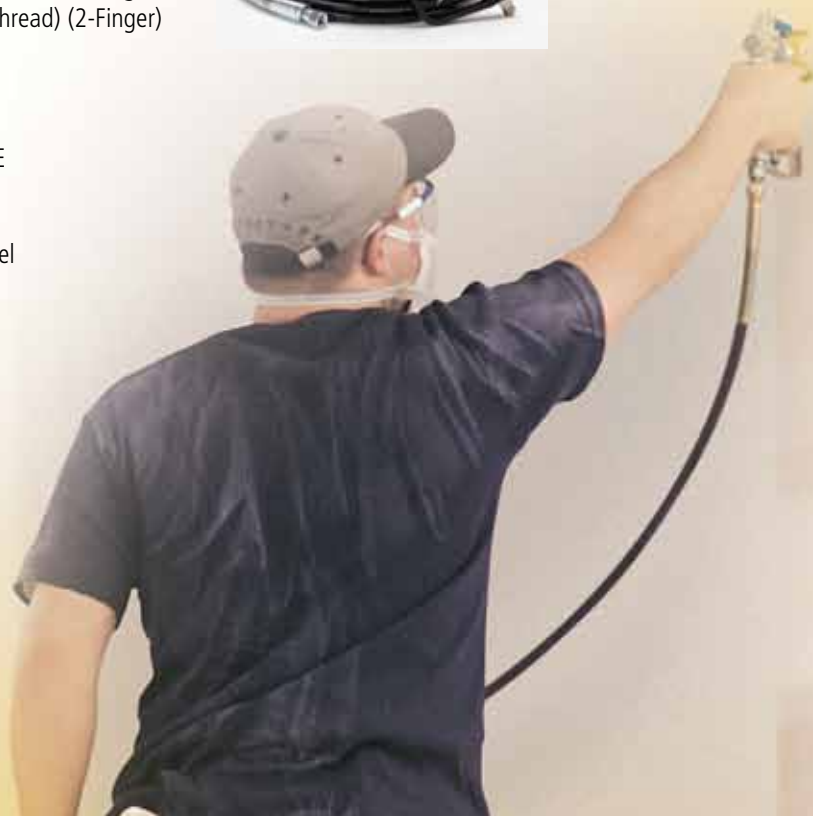

Mini Poles

- Durable stainless steel construction for rust resistance
- Hand-Tight system allows for easy attachment to gun, without tools

3400 Series

With Uni-Tip Hand-Tight Base ("G" thread only)

6 in (15.2 cm)	Part # 248233
12 in (30.5 cm)	Part # 248234
18 in (45.7 cm)	Part # 248235
24 in (61.0 cm)	Part # 248236

With Super-Zip Hand-Tight Base

6 in (15.2 cm)	Part # 3406-SF	Part # 3406-SG
12 in (30.5 cm)	Part # 3412-SF	Part # 3412-SG
18 in (45.7 cm)	Part # 3418-SF	Part # 3418-SG
24 in (61.0 cm)	Part # 3424-SF	Part # 3424-SG

With Flat Tip Base Wrench Tight

6 in (15.2 cm)	Part # 2406-F	Part # 2406-G
12 in (30.5 cm)	Part # 2412-F	Part # 2412-G
18 in (45.7 cm)	Part # 2418-F	Part # 2418-G
24 in (61.0 cm)	Part # 2424-F	Part # 2424-G

*3400 Series
Mini Pole*



- Two or more poles can be combined for extended reach
- Available in 4 lengths and "F" and "G" thread sizes to fit all guns
- For spraying ceilings, overhangs, floors, and decks

3500 Series*(with Anglehead)

With Uni-Tip Hand-Tight Base ("G" thread only)

6 in (15.2 cm)	Part # 255258
12 in (30.5 cm)	Part # 255259
18 in (45.7 cm)	Part # 255260
24 in (61.0 cm)	Part # 255261

With Super-Zip Hand-Tight Base

6 in (15.2 cm)	Part # 3506-SF	Part # 3506-SG
12 in (30.5 cm)	Part # 3512-SF	Part # 3512-SG
18 in (45.7 cm)	Part # 3518-SF	Part # 3518-SG
24 in (61.0 cm)	Part # 3524-SF	Part # 3524-SG

With Flat Tip Base Wrench Tight

6 in (15.2 cm)	Part # 2506-F	Part # 2506-G
12 in (30.5 cm)	Part # 2512-F	Part # 2512-G
18 in (45.7 cm)	Part # 2518-F	Part # 2518-G
24 in (61.0 cm)	Part # 2524-F	Part # 2524-G

*3500 Series
Mini Pole*



Maxi Poles

Hand-Tight Maxi Poles accept Hand-Tight adapters and an additional Maxi Pole or Mini Pole for 12 ft maximum length.

- Includes Anglehead™ to adjust spray angle
- Available in "F" and "G" thread sizes to fit all guns

With Uni-Tip Hand-Tight Base ("G" thread only)

Part # 248242	2 ft (60.9 cm)
Part # 248243	3 ft (91.4 cm)
Part # 248244	4 ft (121.9 cm)
Part # 248245	6 ft (182.9 cm)
Part # 248246	9 ft (274.2 cm)

With Super-Zip Hand-Tight Base

Part # 7402-SF, 7402-SG	2 ft (60.9 cm)
Part # 7403-SF, 7403-SG	3 ft (91.4 cm)
Part # 7404-SF, 7404-SG	4 ft (121.9 cm)
Part # 7406-SF, 7406-SG	6 ft (182.9 cm)
Part # 7409-SF, 7409-SG	9 ft (274.2 cm)

With Flat Tip Base

Part # 7302-F, 7302-G	2 ft (60.9 cm)
Part # 7303-F, 7303-G	3 ft (91.4 cm)
Part # 7304-F, 7304-G	4 ft (121.9 cm)
Part # 7306-F, 7306-G	6 ft (182.9 cm)
Part # 7309-F, 7309-G	9 ft (274.2 cm)

Part # **3430-G, 3430-F** Connect two poles

Part # **233951** Pole Gasket (1)

AngleHead

- In-line AngleHead Swivel provides accurate spraying at any height or angle
- Swivels to 90° (shown) for easy spraying of challenging areas
- Tip not included

- Part # **7506A** ("F" thread) no base included
- Part # **7506AG** ("G" thread) no base included
- Part # **248247** with Uni-Tip Hand-Tight Base ("G" thread only)
- Part # **7506-SF** with Super-Zip Hand-Tight Base
- Part # **7506-SG** with Super-Zip Hand-Tight Base
- Part # **7551-G** Pole to Gun Adapter, Hand-Tight
- Part # **7551-F** Pole to Gun Adapter, Hand-Tight
- Part # **87500G** With Flat Tip Guard, Wrench-Tight
- Part # **87500F** With Flat Tip Guard, Wrench-Tight
- Part # **7556-G** Pole Gun Adapter, Wrench-Tight
- Part # **7556-F** Pole Gun Adapter, Wrench-Tight



0° to 90° (90° Shown)

Maxi Pole



Zip-Roll™ Pressure Roller

The Zip-Roll pressure roller accessory attaches and is fed paint from your airless pump allowing you to use your system to roll in areas where spraying is not practical. Provides smooth, continuous delivery of paint to all types of surfaces. Just trigger gun to release paint to roller. Pressure rolling is 4 times faster than standard rolling!

- Extends reach – no need for a ladder
- Chrome-plated stainless steel frame provides rust resistance and eliminates streaking
- Hand-Tight system for easy assembly – no tools required

Zip-Roll Pressure Roller

(Includes Combo Gun)	3 ft	6 ft
Wrench-Tight with Flat Guard	Part # 970309(F)	Part # 970609(F)
Wrench-Tight with Flat Guard	Part # 970309(G)	Part # 970609(G)
Hand-Tight with Zip Guard	Part # 980309(F)	Part # 980609(F)
Hand-Tight with Zip Guard	Part # 980309(G)	Part # 980609(G)
Hand-Tight with Super Zip Guard	Part # 980309(SG)	Part # 980609(SG)
Hand-Tight with Super Zip Guard	Part # 980309(SF)	Part # 980609(SF)
Zip-Roll Frame only	Part # 244278	



45° Swivel Fitting Kit

To be used between the gun and Heavy-Duty Extension for pressure rolling. ("G" to "G" thread)

Kit Includes (239531, 166969, 114049)

Part # **239531**



Gun Filters – 2-Pack

- Stainless Steel Mesh to eliminate rust

200 Series

Part # **248677** 60 Mesh & 100 Mesh (1 ea.)

300, 400, 500 Series and Combo Gun

Part # **4435-2** Extra Fine 200 Mesh Red for Varnishes and Lacquers

Part # **4434-2** Fine 100 Mesh Yellow for Enamels and Stains

Part # **4433-2** Medium 50 Mesh White for Latex Paints

Part # **4436-2** Coarse 30 Mesh Green for Heavy-bodied Paints



Paint Strainers

Pre-filter your paint using Strainer Bags.

Part # **865662** Suction Filter Cover – 12 Pack

Part # **238769** Strainer Bags – 25 Pack



- Convenient Zip-Clip™ holds roller cover securely on frame and quickly releases for easy cleanup
- Few parts for quicker cleaning time

Zip-Roll Pressure Roller

Attaches to gun that comes with units. Includes: 45° "G" thread gun adapter, 24 in. (61 cm) extension, 9 in (23 cm) roller frame & 1/2 in (13 cm) nap cover
Part # **287713**



Zip-Roll Pressure Roller Covers

High-quality, all-purpose Pressure Roller Covers, Available in a variety of Naps. (Must be ordered in multiples of 6)

Part # **7721** Smooth Surfaces – 9 in x 3/8 in (23 cm x .95 cm)

Part # **7722** Semi-Smooth Surfaces – 9 in x 1/2 in (23 cm x 1.27 cm)


Part # **7723** Medium Surfaces – 9 in x 3/4 in (23 cm x 1.90 cm)

Part # **7724** Rough Surfaces – 9 in x 1 1/4 in (23 cm x 3.18 cm)



Quick Flush™

- The only clean water flushing system
- Cuts Sprayer clean-up time in half!
- Connects to standard garden hose to backflush sprayer through gun
- Includes "F" Adapter to work with all brands of gun
Part # **865681** (Spray gun not included)



Gun Repair Kits

- Includes Ball Valve Plunger, Assembly and Diffuser.
Part # **288817** 500 Gun repair kit
Part # **4427-F, 4427-G** 400 Series Gun
Part # **3027-F, 3027-G** 300 Series gun
Part # **6727-F, 6727-G** Combo Gun

Note: 400 Series Gun Repair Kits may be used in 300 Series Guns.



"F" to "G" Adapter

- Converts 11/16 in (17 mm) "F" Thread to 7/8 in (22 mm) "G" Thread
Part # **248248**



TEXTURE ACCESSORIES

ASM Professional Hopper Gun

Sprays acoustics, drywall mud, waterproofing material, pool deck sealant, stucco, and most gravity-fed materials. Angled 1-1/2 gallon (5.7 L) hopper allows more material capacity for longer spraying before refills!

Zip-Tex™ 650 Gun

Part # **288906** Gun only

Zip-Tex 750, 900 and 1000

Part # **288905** Gun only

Part # **246409** Gun including Hopper



Spray Nozzles

Part # **234153**

Beige, 4 mm — Fine Finish, Orange Peel
White, 6 mm — Orange Peel, Fine Splatter
Gray, 8 mm — Splatter, Small to
Medium Knockdown
Black, 12 mm — Acoustics,
Large Knockdown, Popcorn

Replacement Parts

Part # **234149**

25 ft (7.6 m) Material/Air Hose
(Zip-Tex 750, 900 & 1000)

Part # **288622**

20 ft Material/Air Hose Kit for Zip-Tex 650

Part # **15C090**

Viscosity Ball — All Machines

Part # **234156**

RotoFlex Replacement Pump Hose
(Zip-Tex 750 & 1000 only) Recommended
replacement after 2000-2500 gallons
(7571-9463 L) of gypsum-based material

Part # **288623**

RotoFlex II Replacement Pump Hose
(Zip-Tex 650 & 900 only)

Part # **234159**

Gun Repair Kit (All guns except 288906 Gun)

Part # **258000**

Gun Repair Kit for 288906 Gun

Part # **234162**

Material Hose Plug and Hopper Gun
Attachment Plug

Part # **234188**

Hopper Clamp

PRESSURE WASHER ACCESSORIES

Standard Nozzles (2525)(2730)

Part # **244768** - Includes: 0°, 15°, 25°, 40°

Part # **805634** - Includes: Chemical Injector Nozzle

Part # **805535** - 0° Red

Part # **805536** - 15° Yellow

Part # **805537** - 25° Green

Part # **805538** - 40° White



Standard Nozzle (3030)

Part # **244769** - Includes: 0°, 15°, 25°, 40°

Part # **805634** - Includes: Chemical Injector Nozzle

Part # **805539** - 0° Red

Part # **805540** - 15° Yellow

Part # **805541** - 25° Green

Part # **805542** - 40° White

Rotating Nozzle

Part # **198012**

Oscillating Nozzle (Not Shown)

Part # **198013**



High Pressure Non-Marking Hose

3/8 in x 50 ft (10 mm x 15 m),
3000 psi (21.0 MPa, 210 bar)

Part # **245416** for 2730/3030

3/8 in x 30 ft (10 mm x 8 m),
3000 psi (21.0 MPa, 210 bar)

Part # **118125** for 2525



Guns

Part # **244784**

Gun with vented composite wand
handle and quick-connect fittings,
5000 psi (344 bar, 34.4 MPa)
max. working pressure

Part # **246674** for use with
2525 only Gun only

Part # **118124** Gun Extension
for 2525



Fluids

ASM fluids and protectants keep your equipment in top performing condition. ASM fluids are approved for use in all airless pumps.

Pump Life™

- Protects pump from corrosion and rust during short- and long-term storage
- Lubricates and cleans to help stop sticking valve seats
- Freeze proof to -30° F (-34° C)
Part # **245650** (8 oz, 237 ml; 48 per case)
245423 (32 oz, 946 ml; Available in multiples of 6)

Packing Seal®

- Prevents coating material from adhering to the pump's piston rod
- Prolongs pump packing life in all brands of piston pumps
Part # **245427** (8 oz, 237 ml; Available in multiples of 6)
Part # **245428** (32 oz, 946 ml; Available in multiples of 12)

Hydraulic Fluid

- Non-foaming formula
- Resists emulsifying and chemical breakdown
Part # **245425** (32 oz, 946 ml; Available in multiples of 12)

Starter Kit

- For lubrication and protection
Part # **245651** (8 oz, 237 ml; Pump Life) (4 oz, 119 ml; Packing Seal)

STAY CLEAN™

- Spray protectant for machine to prevent paint from sticking to it. Keeps your sprayer looking new for years!
Part # **865705** (14 oz, 379 grams) case of 12 cans

MagiCLEAN™

- Safely removes paint from sprayers hose, tips and guns
Part # **865657** (Starter kit with 3 gal. MagiCLEAN, strainer basket and residue tray)
Part # **865656** Refill bottle for starter kit
Part # **865655** Case of 12-8 oz jars for cleaning tips, guards and gun filters

Pump Conditioner

- Should be used on piston pumps between uses to prevent paint from drying on the piston & causing packing wear
Part # **865712** Display of 48 - 1 oz bottles
Part # **865714** (1 Quart; .951) bottle – case of 12
Part # **865715** (1 Gallon; 3.78 l) bottle – case of 4
Case quantity: 12 on quarts, 4 on gallons





ASM CUSTOMER SERVICE

20500 David Koch Ave.
Rogers, MN 55374
Phone: 800-854-4025
Fax: 800-228-5104

WARRANTY

ASM warrants its products to be free of defects in material and workmanship for one year. See operation manual for complete warranty information.

ASM AUTHORIZED SERVICE AGENCIES

Call 1-800-854-4025 or see our website for the nearest ASM Authorized Service Agency.

**VISIT US ON THE WEB FOR PROMOTIONS,
PRODUCT UPDATES, MANUALS, SERVICE CENTERS
AND GENERAL INFORMATION.**

www.asmcompany.com



©2010 ASM Company. Form No. 341524 Rev. A 12/10 Printed in U.S.A.
All other brand names or marks are used for identification purposes and are trademarks of their respective owners.

TACKLE ANY JOB WITH CONFIDENCE!